

From: [Peter Anderson](#)
To: [Jack Gibson](#); [Monty Schmitt](#); [Larry Bragman](#); [Cynthia Koehler](#); [Larry Russell](#)
Subject: Mandatory water rationing
Date: Tuesday, July 20, 2021 9:18:14 PM
Attachments: [Document4.docx](#)

MANDATORY WATER RATIONING

Bill McKibben, author, environmentalist and activist said we are in WWII as we face extreme climate disruption and we are losing the war.

Within months after the devastating attack at Pearl Harbor, FDR had ensured that mandatory gasoline rationing was in effect in all 48 states. Gas and rubber was needed for an all-out war effort. Americans would sacrifice driving their sacred automobiles for the duration. At first, the government urged voluntary gasoline rationing. That did not work but by the spring of 1942, 6 months after the attack, the first 17 states put mandatory gasoline rationing into effect, and by December controls were extended across the country.

FDR didn't wait for a messaging program to raise awareness. He did what he had to do and people accepted it because it was appropriate to the threat. It was fair, and it was strictly enforced. It was the law.

The entire western US is drying and burning up. We too are under attack.

Therefore, we need you, the Board Members to enact proposals with teeth that will ensure whole hearted cooperation now.

To conserve drinking water we don't need proposals that make suggestions, ask politely and hope for the best.

We are asked to make significant cuts in our use of water at the household level. I believe the response will be overwhelming when we believe that you are so committed to conservation of our limited water supply that you will declare it is illegal to water lawns and golf courses.

And – most difficult for you – to declare a moratorium on all new water hookups.

Convince us that you realize the gravity of our shared predicament, and that you will do whatever it takes to realize significant cutback immediately, regardless of the public resistance and/or political consequences that strict water rationing may bring forth.

Gabriel Garcia Marquez said:

“Wisdom comes to us when it can no longer do any good.”

Do we have the wisdom and courage to prove him wrong?

From: [John Kling](#)
To: [Jack Gibson](#)
Subject: Phoenix Lake expansion
Date: Tuesday, July 20, 2021 7:44:47 PM

Greetings:

I am a Marin County resident living in San Rafael. At the outset I acknowledge that I am not an engineer, but a retired attorney I hike around Phoenix Lake frequently. I understand why the lake was drained. I am wondering if anyone has considered excavating some of the earthen walls surrounding the lake while it is drained in an effort to expand it's water holding capacity. It would be an expensive proposition. However, I have read many times that California now has a surplus fund for infrastructure projects intended to expand California's water holding capacity. I believe any amount of earth removed would expand the capacity of Phoenix Lake for future use.

Thank you for your consideration of this idea. Feel free to forward it to your fellow Directors and anyone you deem necessary to consider it's implementation.

Respectfully submitted,

John Kling
(415)450-5052

Terrie Gillen

From: NANCY PRAETZEL <npraetzel@aol.com>
Sent: Tuesday, July 20, 2021 2:02 PM
To: Board Comment
Cc: alayzer@me.com
Subject: Moratorium on new hook ups

To Board members:

This draught is the worst on record. We will not know, until at least December or January whether or not enough rain will fall in the coming wet season to adequately fill our lakes for the next year or longer. If there is not adequate rain, and none can predict this with any degree of certainty, the shortage will continue and get worse, if such is possible. It is difficult to imagine what life in Marin would be like if we have to go into an extended period with bone dry lakes.

I believe we are now at a point where we must conserve every drop. **Therefore I urge the District to enact as soon as possible a total moratorium on new water hookups.** It matters not that doing so will only save a small percentage of what is needed. Every drop counts. It is not fair to sacrificing rate payers who are supposedly paying for a “reliable” source of water to allow development to access water for people who are not here yet. It matters not that construction and development projects will be put on hold, the “on hold” time will supposedly be relatively brief and the current situation, without a moratorium, puts the total burden of shortage on many other parts of our economy including nurseries, gardeners, parks, and other recreation facilities, not to mention the sacrifices of individual rate payers. The issue of the County’s need for “affordable housing” is indeed a sticky one, but I do not believe that even such a crucial need should allow for dispensing water we do not have.

One other thing. I was involved in the water conservation movement after the draught of 1976-77. At the time, Conservation alone was not considered a possible source for adequate new supply, but the Water conservation committee persisted and proved that there was a lot of water that with conservation, could be applied to “new supply”. There was talk of getting enough supply to provide a “cushion” to allow for future draughts. Apparently that never happened, or else someone misfigured some where along the line. From this point on, the District should figure the amount of water it can rely on for a year and use that when determining if there is enough water to support development.

Thank you for your consideration

From: [SYDNEY PARK](#)
To: [Jack Gibson](#); [Monty Schmitt](#); [Larry Bragman](#); [Cynthia Koehler](#); [Larry Russell](#)
Subject: Two concerns
Date: Wednesday, July 21, 2021 3:22:27 PM

Having just crossed over the bridge at Shasta and also viewed Mt.Shasta from hwy 5, I am concerned with the slow progress we are making to obtain water. I am sure there are other communities doing the same. If we don't act fast to reserve some water rights won't we face the possibility that there will be none left for us?

My second question that has not been addressed concerns new swimming pools. Since you were originally proposing to limit the topping off of existing pools how are you justifying the filling and construction of new ones. There are at least two under construction on Lilac Ave. in Kentfield. Why is the general public's water restricted severely while many gallons are being used to fill a new pool?

I would really appreciate answers to both questions.

SYDNEY PARK

slpark@comcast.net

From: [Olivia Miller](#)
To: [Jack Gibson](#); [Monty Schmitt](#); [Larry Bragman](#); [Cynthia Koehler](#); [Larry Russell](#); [Water Conservation](#)
Subject: Re: Vegetable Gardens and Water Restrictions...
Date: Thursday, July 22, 2021 10:39:29 AM

Dear MMWD Board of Directors,

I am hoping for clarification on the new water use restrictions as they pertain to vegetable-only gardens, irrigated using drip lines.

I work for a local, woman-run edible landscaping company called [The Backyard Farm Company](#). We plant and tend around 35 raised-bed organic vegetable gardens for clients around Marin. All of our clients' beds are on drip irrigation lines and totally automated.

We want to make changes to help our customers cut back their water use. Many of them are completely in the dark on restrictions, so it is up to us to make these changes for them. We are torn, because their gardens dying, means us losing our jobs. Unlike ornamentals and lawns which will come back with rains in winter, our vegetable beds will not survive if only watered on drip twice per week. To stick to this twice per week rule, we would need to water them twice per week for the longest amount of time allowed. We feel like this will be more wasteful than sticking to what we do now.

I'm afraid to ask, if we only water on drip twice per week, for how long can we water each time?

We are curious how and when our clients will be fined if they use too much water. Will you look at their bills and usage times?

When I watched your 4/20 hearing, there was a concession made for watering vegetable gardens. I am wondering (hoping) that concession still applies to vegetable gardens. **Are vegetable gardens excluded from these rules?**

Thank you for any clarification you can offer!

Sincerely,
Olivia Miller

Olivia Miller *Farmer, The Backyard Farm Company*
olivia@thebackyardfarmco.com
[https://link.edgepilot.com/s/3d7d31d2/Fw0MYBZtmUuwWteE_lmiMA?](https://link.edgepilot.com/s/3d7d31d2/Fw0MYBZtmUuwWteE_lmiMA?u=http://www.thebackyardfarmco.com/)
[u=http://www.thebackyardfarmco.com/](http://www.thebackyardfarmco.com/)

[Download Our Free Seasonal Planting Guide!](#)

From: Olivia Miller

Sent: Tuesday, April 20, 2021 12:12 PM

To: JGibson@MarinWater.org <JGibson@MarinWater.org>; MSchmitt@MarinWater.org <MSchmitt@MarinWater.org>; LBragman@MarinWater.org <LBragman@MarinWater.org>; CKoehler@MarinWater.org <CKoehler@MarinWater.org>; LRussell@MarinWater.org <LRussell@MarinWater.org>

Subject: Vegetable Gardens and Water Restrictions...

Dear MMWD Board of Directors,

I am grateful for our water district that prioritizes nature and also makes sure there is enough H2O to go around to our massive county!

It is obviously the right thing to do to limit water use this year, and likely is the future here-- as we adapt to life in a warmer county, a much hotter planet.

I will make this short-- I am hoping there is some concession to be made for drip irrigating vegetable gardens! **I am emailing to make a plea that you make an exception for watering vegetable gardens during this drought. OR perhaps you offer some sort of rebate to folks who can prove they are irrigating vegetable gardens with drip, and can show receipts for mulch.**

I am a Marin Master Gardener, fully bought into hydrozones, natives, and low water plants. I am also an employee of [The Backyard Farm Company](#). We plant and maintain vegetable gardens in peoples' backyards around Marin. We enrich our soil with local compost that retains water, waste no water using drip systems at all of our gardens, plant seasonally appropriate plants (tomatoes and eggplants that once established, have long roots that tap into deeper sources of moisture), and this year we will mulch each and every plot. We will abide by [these great water-saving veggie-gardening tips!](#)

There are so many benefits of growing one's own food-- for the body, the mind, and the planet!

Please consider the veggies, me, and my little local gardening company, when you make your important decision this evening.

Thank you,
Olivia Miller

Olivia Miller *Farmer, The Backyard Farm Company*



olivia@thebackyardfarmco.com
[https://link.edgepilot.com/s/3d7d31d2/Fw0MYBZtmUuwWteE__ImiMA?](https://link.edgepilot.com/s/3d7d31d2/Fw0MYBZtmUuwWteE__ImiMA?u=http://www.thebackyardfarmco.com/)
[u=http://www.thebackyardfarmco.com/](http://www.thebackyardfarmco.com/)



[Download Our Free Seasonal Planting Guide!](#)

From: [Thomas G Lambach](#)
To: [Larry Bragman](#)
Subject: MMWD Priorities
Date: Friday, July 23, 2021 12:00:16 AM

Dear Director Bragman,

I'm a desalination advocate because it is a permanent water source in an increasingly arid state. The June 18 Operations meeting conveyed a meek response to a water shortage. In my view the District's mission is to supply water, yet, as in most public venues, peripheral considerations and distractions get folded into the mix.

Marin has enjoyed fairly predictable rainfall so MMWD's mission was passive: capture it, clean it and pipe it to the customers. A per-capita MMWD water budget may be a measure of system demand with rates keyed to use on the revenue side and sources prioritized on the supply side. I say this because so much of the discussion, particularly from one Director seemed to be along the lines of how can we muddle thru this shortage at the lowest cost, yet she also realized the displayed time line to actually do something was unrealistic, especially given no mandate(s) by the Board. The public message is equally lame.

Director, the Board has to get serious, when the water is gone, the Board will be gone.

Two or three years ago Santa Barbara expanded its desalination plant in anticipation of future need; it supplies about 30% of the city's needs. The video is instructive, especially with respect to time lines - YEARS - despite the City having done it before and knew what needed to be done!

<https://link.edgepilot.com/s/701f03e8/QOpMsGuBhki9-RMfnqqmLQ?u=https://www.youtube.com/watch?v=6dkHkuVMC9g>

Thomas Lambach

Kentfield

From: [Mary Anne McKernie](#)
Cc: [Jack Gibson](#); [Monty Schmitt](#); [Larry Bragman](#); [Cynthia Koehler](#); [Larry Russell](#)
Subject: Golf course potable water use
Date: Saturday, July 24, 2021 3:00:56 PM

MMWD Directors:

As a citizen concerned about the myriad risks associated with the drought, I would like to urge MMWD to mandate further water usage reduction by golf courses (beyond their 40% reduction to date) and their use of non-potable water. Golf course water usage is massive (7.2M gallons/year). And even though MMWD encourages, and even provides rebates for, water usage reductions by residential customers—advocating for brown lawns, unwashed cars and distributing MMWD-branded 5-minute shower timers---fairways and putting greens at golf courses remain green.

My understanding is that some of the water being used by golf courses is being diverted from public parks and fields. Before the costs of golf courses' overuse further impacts residential customers—when the need to import water will be borne by them at greater expense--I believe that this should be addressed now.

Thank you for your consideration.

MARY ANNE McKERNIE

MaryAnne@mamDESIGN.com

415.717.3949

From: [nick javaras](#)
To: [Jack Gibson](#)
Subject: Golf course water usage
Date: Saturday, July 24, 2021 10:49:40 AM

Mr Gibson . It is beyond ridiculous that home owners are being asked to limit water usage but local golf courses aren't. And they are using potable water. And even though they have reduced their consumption it is not enough. Stop them please. . Sent from my iPhone

From: [george.mcneil](#)
To: [Jack Gibson](#)
Subject: Golf courses
Date: Saturday, July 24, 2021 10:59:26 AM

Stop watering

George

From: [Z](#)
To: [Jack Gibson](#)
Subject: Infrastructure
Date: Saturday, July 24, 2021 9:54:38 AM

I am a longtime Marin Resident,

Marin needs to initiate larger public works projects to prepare for our evolving climate and population demands.

Please put effort towards deeper and larger water wells wherever you can, and desalination plants along the coast if necessary.

From: [John Harris](#)
To: [Jack Gibson](#); [Monty Schmitt](#); [Larry Bragman](#); [Cynthia Koehler](#); LRussell@marineater.org
Subject: WATER STRATEGY
Date: Wednesday, July 28, 2021 12:16:37 PM

Ladies & Gentlemen of the Board:

While acknowledging that we are in a critical situation, I find it very difficult to take the current strategy of water conservation seriously largely because I don't believe that this Board is doing so.

The strategy seems to be hopes and prayers for rain next year without a long term plan for a reliable supply of water for the community. I have lived here for more than 40 years and in fact arrived in 1977 from the Northwest where water in the tap was a given, only to be met with severe restrictions on my water usage. Over the years, more by luck than judgement we have managed but only because it rained next year. Maybe it won't! Year by year it gets less likely.

I am not aware of any strategy that you may have developed to mitigate this Hail Mary approach.

Water has been moved from place to place from source to where it is needed for centuries. More recently the transfer of water from Northern California to the south (see Mono Lake)

We transport oil and liquid natural gas over thousands of miles in pipe lines. Why not water?

In the Middle East, where water is used as a weapon, desalination has been in use for years. I would refer you to an article in this week's Economist which indicates that desalinated, potable water is being produced, using solar power, at 50c per cubic meter.

I grew up in post war England so conservation, repurpose and reuse is second nature. We used to bathe once a week, girls first and boys next in tepid, soapy water!

A long term well thought out strategy rather than hopes and prayers would make conservation much more palatable. You can't conserve it if it's all gone!

John Harris

From: [Jerome Gilbert](#)
To: [Cynthia Koehler](#)
Subject: Bridge pipeline
Date: Monday, August 2, 2021 10:04:14 AM

Good morning Cynthia,

We are now living in Marin County at the Tamalpais Residence and have been following your efforts to shore up dry year supplies. In today's interview, you said that the pipeline is the likely solution. I could not agree more.

The potential for long-term security, and reduced operating costs, is very good. Once EBMUD completed the Freeport project, it opened up access to the transfer market which gives a buyer much more leverage. If you were connected. It occurred to me that North Marin could also benefit with an appropriate exchange arrangement.

These are stressful times in the water world, and I wish you the best of luck with CalTrans in particular.

Jerry Gilbert
925 254 8863

From: [Ria German-Carter](#)
To: [Board Comment](#)
Subject: Comment for tonight's Open Board Meeting
Date: Tuesday, August 3, 2021 12:59:29 PM

I am resending this, as I just read not to include address and phone number. Please replace my previous email with this one. Thank you.

To whom it may concern,

I would like to attend tonight's open board meeting. I just spoke with ranger John McConneloug and Sabrina, who mentioned that I would need a password link to the meeting. I hope that you can provide that for me, so that I might participate and speak briefly regarding my concerns.

My comment for tonight's meeting:

"I am concerned about the trail blockade which was recently installed on Old Mountain Tunnel Road. We recently bought our property at 740 Bolinas Road, which is actually on Old Mountain Tunnel Road, adjacent to the road blockade. The blockade impacts our access to the trails off Concrete Pipe Road, one of the primary reasons for buying this property. As seniors, we will be putting our safety at risk walking down Bolinas Road to the trailhead. Bolinas Road has blind curves and no shoulder, and is already shared by both bicyclists and autos. Adding pedestrians and dogs to the mix seems much more dangerous than crossing the bridge. I hope that we can work together to provide safe access via the bridge for both pedestrians and cyclists in the near future, by using an easement or other modification. Thank you for your consideration."

Ria German-Carter
Barry Carter

From: [M](#)
To: opinion@marinij.com; drodini@marincounty.org; chair@maringop.org; [Jack Gibson](#); [Monty Schmitt](#)
Subject: Conservation
Date: Monday, August 2, 2021 2:53:21 PM

I was not surprised that supervisor Dennis Rodini worked for the water district. His entire article put the entire onus on users not the supplier for sufficient water. He talks of using recycled water and even recycling toilet water. He said many people talk about desalination and other cures but said we lose interest when it rains. Sure enough. But his article was sort of confusing. He wants us to catch rain water for watering but if there is a big rain storm I won't need to catch water. Maybe he means I should keep the rain water in big vats on my front lawn until the summer.

But Rodini is typical of what we have in the water district and civic center. He likes fish more than people and closed down the San Geronimo Gulf course to make it a happier place for the fish. As supervisor he offers no logical solution to the water storage. His solution is for us to capture water and save the water guys from embarrassment. Where do guys like him come from.

We need leaders with foresight. We need leaders to solve the water problem and not put the onus on the users. Evidently Rodini has no question for the water board, just us. We need to use desalinated water but my guess is Rodini sees the ocean water as sacred and to use it would be a sin again nature. So we will continue to ration, continue to be gouged in costs while the water guys keep their jobs and get more money for less use. What's wrong with this picture. I thought in a democracy people were in charge.

Robert A. Casper, SR
San Rafael, CA

From: [Virginia A Beauchamp](#)
To: [Cynthia Koehler](#)
Subject: Water collection options
Date: Monday, August 2, 2021 8:22:42 PM

Hi

I wasn't sure who to contact but I was wondering if an option such as the following referenced in the Smithsonian magazine article would be feasible in Marin. With our great supply of summer fog we could potentially harvest a lot of water. There are many designs that are being used to get water to people in arid areas that use thin collection wires and this is only one

option. https://link.edgepilot.com/s/8a2629a0/OqYt31_XxEKYy18MLp-r1A?u=https://www.smithsonianmag.com/innovation/this-tower-pulls-drinking-water-out-of-thin-air-180950399/

https://link.edgepilot.com/s/a945cb84/ezuMrDJyUCmF_6Fr2L8gQ?u=https://academic.oup.com/ijlct/article/15/2/253/5718410

Perhaps you have already researched these types of options but I thought I would send these links in the event you have not.

Thanks for your time and consideration.

Sincerely yours,

A concerned citizen,

Virginia Beauchamp

Greenbrae, California

This Tower Pulls Drinking Water Out of Thin Air

Designer Arturo Vittori says his invention can provide remote villages with more than 25 gallons of clean drinking water per day



Warka Water towers are designed to take advantage of condensation. (Architecture and Vision)

By [Tuan C. Nguyen](#)
smithsonianmag.com
April 8, 2014

923

937

70

In some parts of Ethiopia, finding potable water is [a six-hour journey](#).

People in the region spend [40 billion hours a year](#) trying to find and collect water, says a group called the Water Project. And even when they find it, the water is often not safe, collected from ponds or lakes teeming with infectious bacteria, contaminated with animal waste or other harmful substances.

The water scarcity issue—which affects nearly 1 billion people in Africa alone—has drawn the attention of big-name philanthropists like [actor and Water.org co-founder Matt Damon](#) and Microsoft co-founder Bill Gates, who, through their respective nonprofits, have poured millions of dollars into research and solutions, coming up with things like [a system that converts toilet water to drinking water](#) and a "[Re-invent the Toilet Challenge](#)," among others.

Critics, however, have their doubts about integrating such complex technologies in remote villages that don't even have access to a local repairman. Costs and maintenance could render many of these ideas impractical.

"If the many failed development projects of the past 60 years have taught us anything," wrote one critic, [Toilets for People](#) founder Jason Kasshe, in a [New York Times editorial](#), "it's that complicated, imported solutions do not work."

Other low-tech inventions, like this [life straw](#), aren't as complicated, but still rely on users to find a water source.

It was this dilemma—supplying drinking water in a way that's both practical and convenient—that served as the impetus for a new product called [Warka Water](#), an inexpensive, easily-assembled structure that extracts gallons of fresh water from the air.

The invention from Arturo Vittori, an industrial designer, and his colleague Andreas Vogler doesn't involve complicated gadgetry or feats of engineering, but instead relies on basic elements like shape and material and the ways in which they work together.

At first glance, the 30-foot-tall, vase-shaped towers, named after a fig tree native to Ethiopia, have the look and feel of a showy art installation. But every detail, from carefully-placed curves to unique materials, has a functional purpose.

The rigid outer housing of each tower is comprised of lightweight and elastic [juncus](#) stalks, woven in a pattern that offers stability in the face of strong wind gusts while still allowing air to flow through. A mesh net made of nylon or polypropylene, which calls to mind a large Chinese lantern, hangs inside, collecting droplets of dew that form along the surface. As cold air condenses, the droplets roll down into a container at the bottom of the tower. The water in the container then passes through a tube that functions as a faucet, carrying the water to those waiting on the ground.

Using mesh to facilitate clean drinking water isn't an entirely new concept. A few years back, an MIT student [designed a fog-harvesting device](#) with the material. But Vittori's invention yields more water, at a lower cost, than some other concepts that came before it.

"[In Ethiopia], public infrastructures do not exist and building [something like] a well is not easy," Vittori says of the country. "To find water, you need to drill in the ground very deep, often as much as 1,600 feet. So it's technically difficult and expensive. Moreover, pumps need electricity to run as well as access to spare parts in case the pump breaks down."

So how would Warka Water's low-tech design hold up in remote sub-Saharan villages? Internal field tests have shown that one Warka Water tower can supply more than 25 gallons of water throughout the course of a day, Vittori claims. He says because the most important factor in collecting condensation is the difference in temperature between nightfall and daybreak, the towers are proving successful even in the desert, where temperatures, in that time, can differ as much as 50 degrees Fahrenheit.

The structures, made from biodegradable materials, are easy to clean and can be erected without mechanical tools in less than a week. Plus, he says, "once locals have the necessary know-how, they will be able to teach other villages and communities to build the Warka."

In all, it costs about \$500 to set up a tower—less than a quarter of the cost of something like the Gates toilet, which costs about \$2,200 to install and more to maintain. If the tower is mass produced, the price would be even lower, Vittori says. His team hopes to install two Warka Towers in Ethiopia by next year and is currently searching for investors who may be interested in scaling the water harvesting technology across the region.

"It's not just illnesses that we're trying to address. Many Ethiopian children from rural villages spend several hours every day to fetch water, time they could invest for more productive activities and education," he says. "If we can give people something that lets them be more independent, they can free themselves from this cycle."

About Tuan C. Nguyen



Tuan C. Nguyen is a Silicon Valley-based journalist specializing in technology, health, design and innovation. His work has appeared in ABCNews.com, NBCNews.com, FoxNews.com, CBS' SmartPlanet and LiveScience.

Review of sustainable methods for atmospheric water harvesting

Hasila Jarimi^{1,2,*}, Richard Powell¹ and Saffa Riffat¹

¹*Buildings, Energy and Environment Research Group, Department of Architecture and Built Environment, Faculty of Engineering, The University of Nottingham, Nottingham NG7 2RD, UK* ²*Solar Energy Research Institute (SERI), Universiti Kebangsaan Malaysia, 43600 Bangi, Selangor, Malaysia*

Abstract

The scope of this paper is to review different types of sustainable water harvesting methods from the atmospheric fogs and dew. In this paper, we report upon the water collection performance of various fog collectors around the world. We also review technical aspects of fog collector feasibility studies and the efficiency improvements. Modern fog harvesting innovations are often bioinspired technology. Fog harvesting technology is obviously limited by global fog occurrence. In contrast, dew water harvester is available everywhere but requires a cooled condensing surface. In this review, the dew water collection systems is divided into three categories: i) dew water harvesting using radiative cooling surface, ii) solar-regenerated desiccant system and iii) active condensation technology. The key target in all these approaches is the development of an atmospheric water collector that can produce water regardless of the humidity level, geographical location, low in cost and can be made using local materials.

Keywords: atmospheric water harvesting; fog collector; biomimicry; innovative sustainable technology

*Corresponding author:
hasila.jarimi@outlook.com

Received 29 June 2019; revised 30 October 2019; editorial decision 13 November 2019; accepted 13 November 2019

1. INTRODUCTION

Globally, the number of people lacking access to water is 2.1 billion, while 4.5 billion people have inadequate sanitation and clean water source [1]. The latter, has led to risk of infected by diseases, such as cholera and typhoid fever and other water-borne illnesses. As a result, the world has witnessed 340 000 children under five die each year from diarrheal diseases alone [1]. Clearly, water scarcity is an issue requiring urgent action. The situation is exacerbated by climate change causing rainfall patterns to change with some areas already experiencing prolonged droughts.

Worldwide, many methods have been used to harvest water such as through water desalination, ground water harvesting and rain water collection and storage. Obviously, for these to work liquid water must already be available, but when such supplies are limited, harvesting atmospheric water becomes essential. Therefore, not surprisingly, it is now receiving considerable attention from researchers worldwide. This paper reviews this work, discussing the various water harvesting technologies and their performance, both theoretical and experimental. Commercialized atmospheric water harvesting technologies are also described. We hope this review will help new workers wishing to enter

this important field by providing introduction to state-of-the-art technologies and inspire them to develop their own ideas for innovative and sustainable atmospheric water harvesting technology. We believe that general readers, with an interest in the welfare of 'water poor' people, will also find this paper useful by showing how emerging water harvesting systems can contribute to improve living standards.

Figure 1 shows how atmospheric water harvesting technologies may be classified. The first category is harvesting water from fog, i.e. a visible cloud water droplets or ice crystals that are suspended in the air at or near the Earth's surface [2]. It normally occurs due to added moisture in the air or falling ambient air temperature. Methods may be usefully divided into 'traditional' and 'modern'.

The second collection category is the collection of water vapour. While fog is visible to our naked eyes, water vapour is invisible and is generated by the evaporation of liquid water or the sublimation of ice. When water vapour condenses on a surface cooled temperature below the dew point temperature of the atmospheric water vapour, 'dew water' will be formed [3]. While fog water harvesting system are more related to traditional concept using a mesh-like structure, there are various technologies related to dew water harvesting technique. The early studies involved passive systems

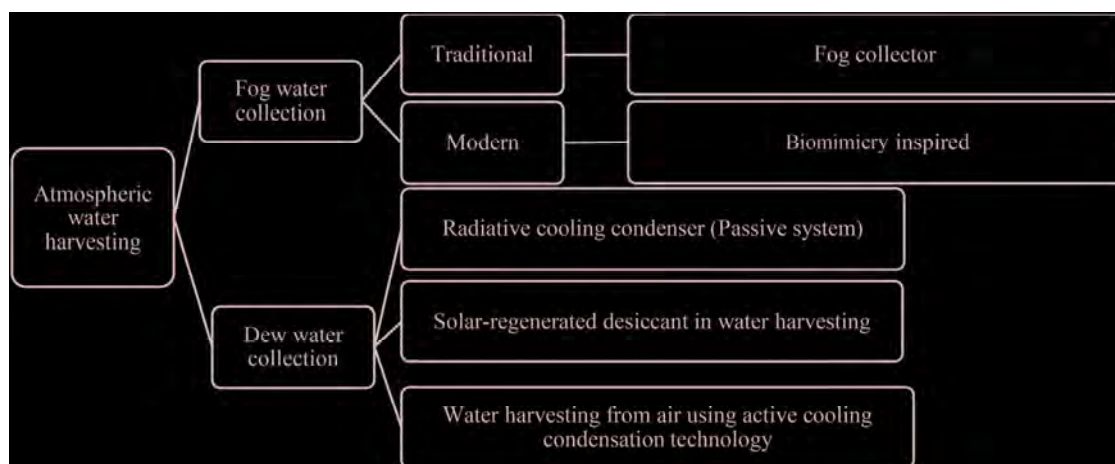


Figure 1. Categories of atmospheric water harvesting techniques.

using radiative condenser, but their low efficiencies resulted in, researchers introducing solar-regenerated desiccant methods to enhance the moisture sorption and desorption, however, still has not proved on its own to be sufficient. Thus, research in dew water harvesting also covers integration with active cooling condenser technology that covers the use of typical vapour compression air conditioning system and most recently, thermoelectric cooler. Due to the high in efficiency of active cooling condenser systems, at the end of this paper, readers will be presented with selected commercially available technology on water harvesting technology involving active cooling condensing system.

2. ATMOSPHERIC FOG HARVESTING

2.1. Fog collector inspired by traditional concept

Illustrated in [Figure 2](#), the traditional fog collecting method is very simple, comprising a mesh exposed to the atmosphere over which the fog is driven by the wind. Two posts on guy wires are used to support the mesh and cables to suspend the mesh. Water droplets trapped by the mesh accumulate and drain under gravity into the channels of the water collection system. Collectors can be usefully classified as standard fog collectors (SFCs) and large fog collectors (LFCs) [2]. SFCs are typically used in a small scale exploratory studies to evaluate the amount of water that can be collected for a specific condition. The collector has a typical size of $(1 \times 1) \text{ m}^2$ surface with a base of 2 m above the ground [4]. LFCs, typically 12 m long and 6 m high has mesh covers the upper 4 m of the collector giving $\sim 48 \text{ m}^2$ of water collection area. They are mainly used for actual harvesting installation. For maximum efficiency, fog collectors should be positioned perpendicularly to the prevailing wind. Typically, LFCs produce 150 l to 750 l of water a day depending on the site [5]. Reported in 2011, the cost for a unit of 48 m^2 fog collectors is US\$400 meanwhile, the 1 m^2 SFCs cost from US\$100 to US\$200 to build depending on the country and the materials [5].

Commercially available, Raschel-weave high-density polyethylene mesh, commonly used for shading crops in hot climates, has

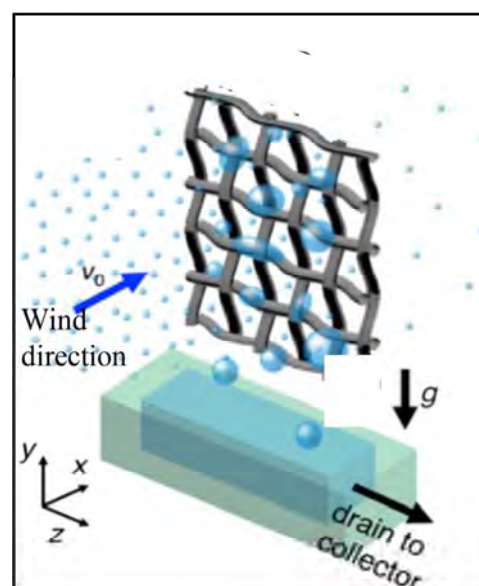


Figure 2. The basic concept of fog collector. Adapted with permission from [6] Copyright (2013) American Chemical Society.

been a popular collector material, although other weaves such as aluminet shade net have subsequently been investigated [7]. Illustrated in [Figure 3](#), the standard Raschel mesh is black in colour, with treated UV-resistance and has 35% shade coefficient S [8]. Shade coefficient S is the portion of the fog collector's area that is capable of capturing fog droplets and can be expressed using the following equation [9]:

$$S = 1 - f, \quad (1)$$

where f is defined as the ratio of mesh openings area to the total screen area.

Along the longitudinal direction, the mesh filament is tied up continuously, meanwhile transversely, we can see that the filaments are not continuous but knotted to the longitudinal one [8]. A leading developer of fog harvesting technology based on

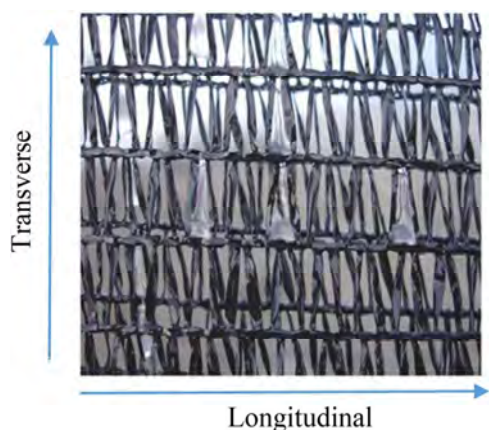


Figure 3. An example of Raschel mesh used in a project by Fog Quest [10].

Raschel-weave shading mesh is the non-profit registered Canadian charity, FogQuest, (www.fogquest.com), which 'is dedicated to planning and implementing water projects for rural communities in developing countries'. Their first fog water harvesting experience dates from 1987. In addition to innovative fog collectors, they have also included rainfall collectors to make optimum use of natural atmospheric sources of water.

2.1.1. Selected projects from the past 30 years to current

Fog harvesting is common in arid and semi-arid areas close to the ocean where clouds are formed over the sea and pushed by the prevailing winds towards the mainland. The clouds would become fog when they intercept with the surface of highlands near to the sea. There are various fog collector installation, both for research and real applications in different places such as Namib Desert, Africa. The desert is well known for its potential in harvesting water through fog collection. Mtuleni et al. [11] conducted an interesting research to find out the quality of the Namibian fog water. Fourteen SFCs were studied at three Topnaar villages in Namib Desert [11]. The highest water collection was 2.122 l/m² at Klipneus village. In terms of the water quality, after a non-foggy period, the initial rinse of SFCs give turbid, brackish water that contains 1630 mg NaCl [11]. The water was considered as marginally fit for human consumptions. Nevertheless, the subsequent water collected after the initial rinse was found fairly cleaner and has low salt content. In the Coquimbo region of Chile, in 1980s, a research project involving fifty 48 m² fog collectors was conducted [12]. Forty-one new large fog collectors were installed to provide fresh water supply for 100 families benefited, supported initially by the foreign partners and then given over to the local population in the 1990s [12]. However, due to the incompetency of the local non-governmental organisation(NGO) in terms of technical skills, the project was reported degraded. Large fog collectors were also developed from 1995–99 utilized mainly for reforestation and restoration of degraded coastal ecosystems near the town of Mejia, Peru [13, 14]. In Pachamama Grande, Ecuador a large scale project was developed such that 40 LFCs were constructed throughout 1995–97 with the collection efficiencies are

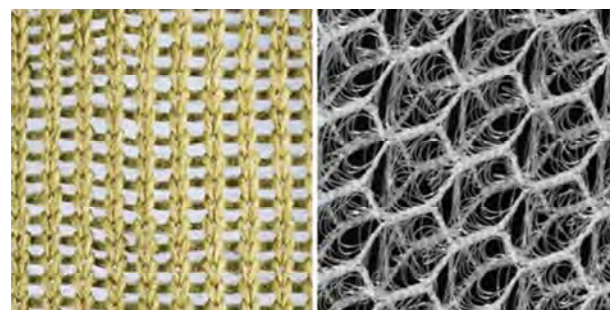


Figure 4. The examples of robust materials. Left: is a robust material with a stainless mesh, co-knitted with poly material. Right: a 3D net structure (1 cm thickness) of poly material [2].

as high as 12 l per square metre per day [15]. Also in the 1990s, in Oman, a major fog collector study was conducted. Daily average collection rates were reported to be as high as 30 l/m². However, the large amount of water collected only happens during monsoon season that occurs about only 2 months in a year. This was considered as a huge limitation to the use of fog collectors in that region [16]. The following Table 1 listed more fog collection projects carried out worldwide.

2.1.2. Fog collectors design

For LFCs, the prevailing wind imposes pressures on the mesh which then imposes forces on the supporting structures and finally weakening/break the foundation. Meanwhile, the mesh and other components of LFCs can be damaged by UV radiation and also other environmental factors. Lacking in rational or engineered design process of LFCs being the main reason to the collapse of LFCs under extreme weather. This apparently explains the maintenance issue faced by the local people in managing fog collectors [8]. In order to suit different environmental conditions for examples for very windy sites, robust materials for the fog collectors were made using stronger stainless steel mesh, co-knitted with poly material. See Figure 4 [2].

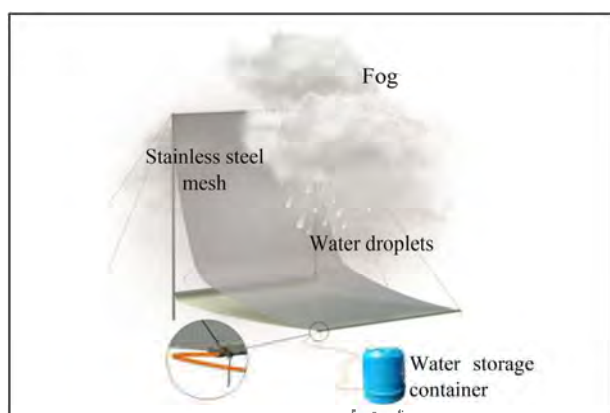
Various collector designs have also been researched by Lummerich and Tiedemann [22] in a field study on the outskirts of Lima (Peru) to address crucial aspects of economic competitiveness of fog water harvesting. Prior to the field testing, five small scale prototypes with different shapes and materials were tested in selecting the most effective fog collector structure. Following the small scale testing, three different types of large scale fog collector were investigated termed 'Eiffel', 'Harp' and 'Diagonal Harp'. The 'Eiffel Collector' is an example of a 3D collector that is used at places with a rare condition with no unique wind direction associated with the occurrence of fog. In their report, a three-winged screen called astropod was introduced as an improved means to evaluate the amount of water yield by fog water harvesting. The use of astropod allowed the measurement of the favourable wind direction and absolute amount of collected fog at the same time. The fog collector designs and the description are summarized in Table 2.

Table 1. *The selected fog collector projects worldwide.*

State/country	Project	Year	Size/design/cost	Type of application/issues	Water collection	Ref
Falda Verde Mountain, Peru	Locally designed fog collector	1998–2001	1.5 m ²	-	100 l (day not stated)	[17]
Alto Patache, Chile	SFC fog collector	1987–2001	-	Primarily for ecosystem and climate research.	6 l per day	[17], [18]
Village of Tojquia in the Western Highlands	35 LFCs	2006–2012	-	High wind speeds are an issue.	Average of 6300 l of water per day in 4–6 months in winter dry season	[2]
Yemen (in the mountains near Hajja, inland from the Red Sea)	25 LFCs	2004	-	Stopped after a year due to insufficient monitoring at community level and issues related to occasional high wind speeds.	4.5 l m ⁻² per day over the 3-month dry winter period	[19]
North West of the island of Tenerife	Four LFCs, in 2000s and four more were added in 2011.	2000s and 2011	-	The water is used for domestic purposes in the Forestry Commission Office, for irrigation for the reforestation of endemic laurisilva species and for prevention of and fight against forest fires.	-	[20]
Lima, Peru	Project- 60 fog nets	2016	Fog catchers' nylon nets designed. Cost: 500 USD per net	Supply free water to 250 households. The water is not drinkable thus used to sustain small scale farming, wash clothes and to wash households' utensils for poor families.	100 l of water per day, a saving of almost 60% in water usage.	[21]
Tojquia, Guatemala	FogQuest project- 35 large fog collectors (LFCs)	Since 2006 to current (2017)	40 square meters	For community use	Produces an average of about 200 l of water a day during the winter dry season.	[10]

Table 2. Selected fog collector designs [22].

The fog collector	Size/design	Type of application	Advantage	Maximum water collection (litres/day)	Country
Eiffel collector	4×8×0.3 m metal frame, two separated layers of Raschel 50% net with 10 additional stripes in between	Large scale experiment	A 3D collector that is advantageous for places with no unique wind direction associated with the occurrence of fog.	2650 l per day during the peak fog season.	Peru
Harp collector	2×4×0.3 m metal frame, 2256 m of 1.5 mm rubber string vertically installed	Large scale experiment		200 l/day during peak season	Peru
Diagonal Harp collector	2×4×0.3 m metal frame, 1520 m of 1.5 mm rubber string diagonally installed	Large scale experiment		94.2 l/day during peak season	Peru

**Figure 5.** The concept of the cloud harvester. The harvester is designed to catch and condense fog into water droplets that in turn run down on a stainless steel mesh into a gutter type extrusion leading to a water storage container [23].

A unique design of fog collector called cloud harvester has been designed by Choiniere-Shields [23], see Figure 5. The concept of cloud harvester is based on a fog catcher that turn the condense fog into water droplet. In comparison to the current model available on the market, the unique part of in the design of cloud harvester is that it uses stainless steel mesh instead of the polypropylene nets with an extra sheet under the net for the water collection. The cloud harvester is expected to have a better condensing efficiency and much smaller than the similar products that are currently on the market. The cloud harvester has a potential water harvesting output of 1 l of fresh water per hour for each 10 square feet of mesh [23].

Aiming to harvest water from the atmosphere to supply fresh drinking water to the community in the developing world, a unique wooden atmospheric water harvesting project called Warka Water has been founded by Arturo Vittori [24]. The project won the World Design Impact Prize 2015–16 at World Design Capital(R) Taipei 2016 Gala [25]. Arturo and his team have developed 12 different prototypes since 2012. Figure 6 shows an example of the prototype and its working principle. The team's target is to develop a prototype that is lightweight (about 80 kg), easy and quick to build using local materials with-

out using scaffolding and power tools. They intend to use bamboo for the frame structure, while the water catchment system will be made from biodegradable mesh 100% recyclable materials. Fog and dew, and also rainwater, will be collected when they strike the mesh and then trickle down a funnel into a reservoir at the base. To prevent water evaporation, a fabric canopy will be used to cover the lower section of the water collector. There is no indication of the amount of water that can be produced by the prototype since the project is still in the exploratory phase. However, the aim of the project is to produce water from fog or highly humid places between 50 to 100 l per day [26].

2.1.3. Fog collector efficiency and feasibility studies

A fog water collector would act as the barrier to the wind-driven fog. However, a portion of the fog is unperturbed by the fog water collector. Although there is a collision with the fog collector, it cannot capture all the liquid water contained in the fog [9]. There are losses due to:

- Fog passing around the fog water collector.
- Fog passing through the openings of the mesh.
- Droplets bouncing back into the airflow.

For the fraction of the fog that is captured by the fog water collector, we call this fraction as fog interception efficiency [9]. The captured water droplet merged, move to the lower part of fog collector, reached the water gutter and transported to the water tank. However, at water gutter, there is a potential of re-entrainment or water can return back to the air flow or some water from the mesh slack, wrinkles and folds, may be entering the gutter and collected at the water tank.

The basics calculation for the fog water collection has been discussed in Rivera [9]. To discuss the collector efficiency, there are four important factors that determine the efficiency of the fog collection and they are wind velocity, fog liquid water content, droplet size distribution and mesh characteristics. The water collector efficiency η_{coll} of a fog collector can be computed using the following equation (2).

$$\eta_{coll} = \frac{\dot{W}_{coll}''}{v_o \cdot LWC} \quad (2)$$

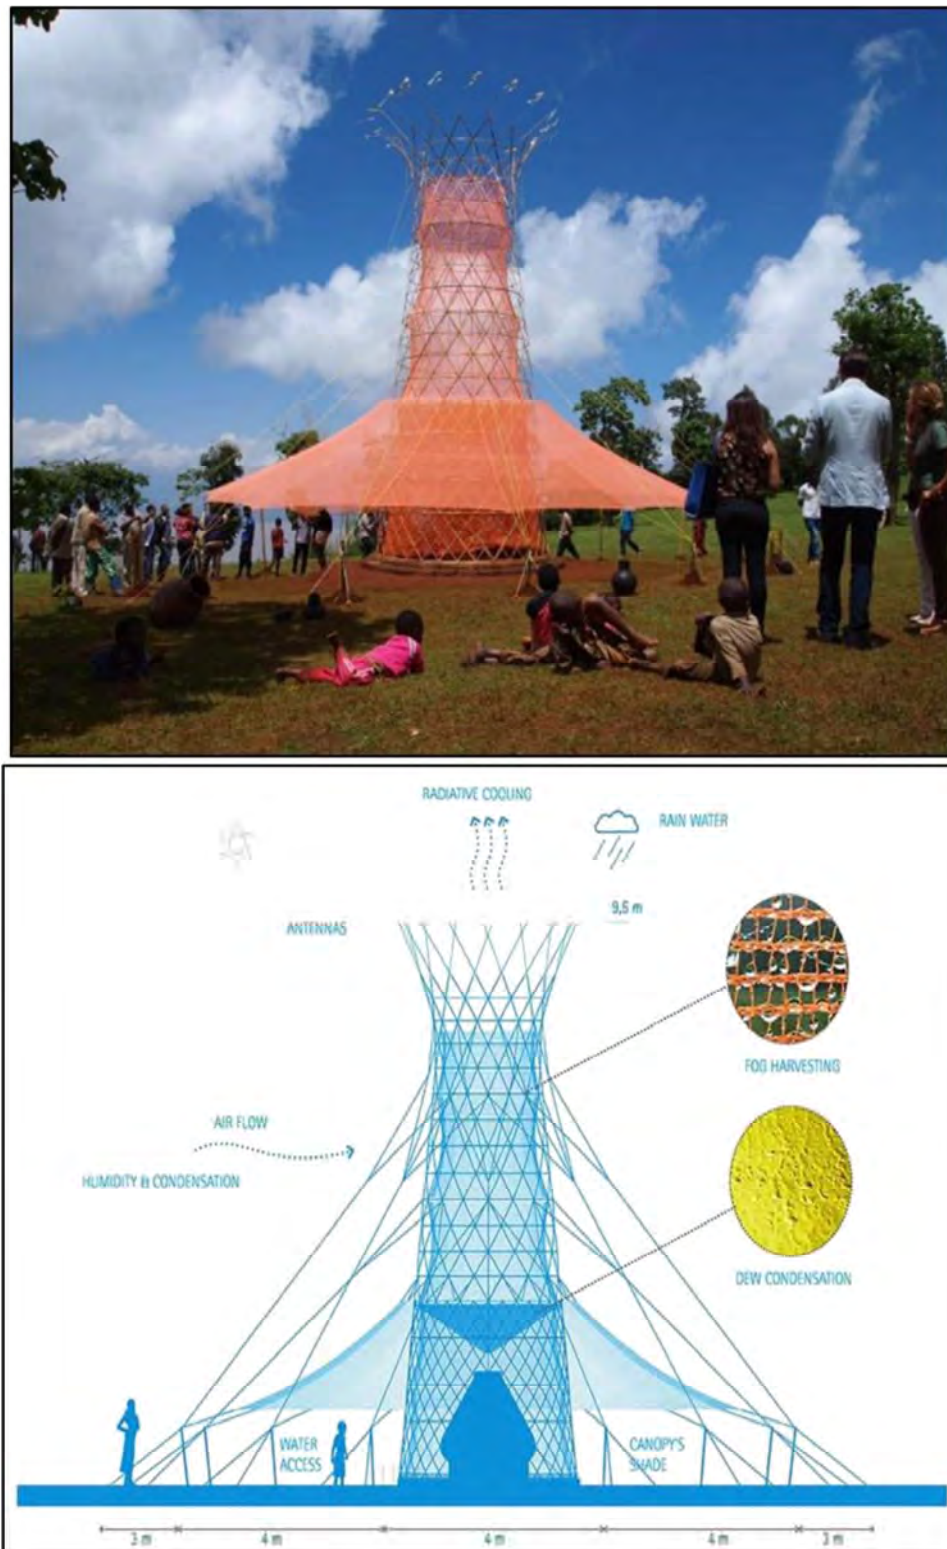


Figure 6. Water bamboo tower top: the working prototype and bottom: the concept [24].

Where \dot{W}_{coll}'' ($\frac{kg}{s \cdot m^2}$) is the water flow rate collected in the gutter per unit screen area, v_o ($\frac{m}{s}$) is the unperturbed wind velocity of the incoming fog/air flow and LWC ($\frac{kg}{m^3}$) is the liquid water content of the incoming fog/air flow.

Additionally, Rivera [9] reported that we can also express the collection efficiency by considering the following conditions:

- i. The aerodynamic collection efficiency η_{AC} , calculated based on the amount of unperturbed fog droplets that would collide with the fog's mesh.
- ii. The capture efficiency η_{capt} , to account for the fraction of the aforementioned intercepted droplets that are actually captured by the mesh wire.
- iii. The draining efficiency η_{dr} , to account for the fraction of the water captured by the mesh that is collected by the gutter since some of the water can spill or re-enter the air flow.

Therefore, the fog water collector can also be expressed using the following equation [9]:

$$\eta_{coll} = \eta_{capt} \eta_{dr} \eta_{AC} \quad (3)$$

Clearly, before installing a fog collector, its practicality must first be assessed. A group of Iranian researchers [27] have discussed the feasibility of implementing fog collectors as a mean to harvest water in their country. Their research has included analysis on the data collected from 10 representative stations located facing the Persian Gulf and Oman Sea. Among the important parameters recorded were 'hourly dry and wet temperature, relative humidity, wind direction and velocity and the dew point temperature'. The values were then used to calculate 'the atmosphere water vapour pressure, saturated vapour pressure and the absolute humidity of the atmosphere' and the feasibility of fog harvesting system predicted by using the equation (4):

$$\text{For } RH \geq 69\%, WH_3 = (3 \times M_t \times U_z \times \eta_{coll} \times 3.6).$$

$$\text{If } RH < 69\%, \rightarrow WH_3 = 0 \quad (4)$$

Where RH is relative humidity measured by weather station, WH is the potential water harvested (litres per square metre per day) and the subscript 3 represents for every 3 hours, an input value chosen because data at the representative stations was recorded 3 hourly, and they assumed stable conditions were achieved after this period is achieved. U_2 is the wind velocity at 2 m height above the ground, M_t is the absolute humidity that is defined as the humidity in grams per cubic meter of air in a specific temperature (g/cm^3). The values of wind speed for eight different wind directions were then investigated. Their analysis have shown promising results for water collection at Abadan and Chahabbar station with the amount of potential collected water is $6.7 \text{ l}/\text{m}^2/\text{day}$ and $156.3 \text{ l}/\text{m}^2/\text{day}$, respectively [27].

2.1.4. Studies on mesh topology

To improve fog collector performance, understanding the effects of fog collector topology is a key as defined especially by the mesh radius and mesh diameter. Collectors can be categorized based on their fibre radius R and the half spacing of the fibres D [28], values that are important in the calculation of Stokes coefficient that is related to the collector efficiency. Stokes number typically determines the inertia of the moist air and its migration

across the streamline and thus indicates the effectiveness of the fog collector design, thus a large Stokes number implies a higher rate of water droplet collection [28]. However, this paper will not further elaborate the equation used for the calculation of Stokes coefficient. Interested readers may refer to [29] for further description. As previously discussed, Rivera [9] investigated aerodynamic collection efficiency (ACE). Rivera [9] considered that two important characteristics of the mesh were the shade coefficient and the characteristics of the fibres used to weave or knit the mesh. He also discussed a simple superposition model in analyzing the influence of these parameters to Regalado and Ritter [29] the ACE of the fog water collectors. Rivera [9] concluded that the ACE value can be increased by introducing concave shape to the fog water collector and improving the aerodynamics of the mesh fibres. Regalado and Ritter [29] have performed a theoretical analysis on wind catchers in the form of cylindrical structures equipped with several screens of staggered filaments to determine their efficiency. Like Rivera [9], these researchers also assessed the aerodynamic effects of the water/fog impacting on the mesh.

2.1.5. Studies on surface wettability of a fog harvester

While most researchers focussing on the mesh topology, Park et al. [6] have investigated the influence of surface wettability characteristics, length scale and weave density on the fog harvesting capability of woven meshes. In their research, Park et al. [6] have developed a model that combined the hydrodynamic and surface wettability characteristics of a fog water collector in predicting the overall fog collection efficiency. From their modelling, later validated against experimental results and depicted in Figure 7, there are two limiting factors that will effect fog harvesting and reducing the collection efficiency; first is the re-entrainment of collected droplets into the prevalent wind, and second one is the blockage of the mesh opening. However, they have concluded appropriate tuning of the wetting characteristics of the surfaces, reducing the radius of the wire and optimizing the wire spacing will lead to more efficient fog collection. Additionally, they have introduced family of coated meshes that have demonstrated enhancement in the fog collecting efficiency as high as five times of the conventional polyolefin mesh. To coat the mesh, quoted from the researchers' paper [6], 'a 1.7 wt.% 1H,1H,2H,2H-heptafluorodecyl polyhedral oligomeric silsesquioxane (fluorodecyl POSS) 98.3 wt.% poly(ethyl methacrylate) (PEMA, MW = 515 kDa, Sigma Aldrich) solution in a volatile hydrochlorofluorocarbon solvent (Asahiklin AK-225, Asahi Glass Company) at a concentration of $10 \text{ mg}/\text{m}^3$ was used by the researchers. They first dipped the mesh in the solution for 5 minutes and then air dried to evaporate the solution. To check the uniformity of the coating, they have used scanning electron microscopic method and also by contact angle measurements at several locations on the coated surface. The aim of the coating is to decrease the contact-angle hysteresis of the mesh wires that allows small droplets to easily slide down into the collecting gutter when they were captured by the mesh wires. Even in a mild fog with a droplet radius of $3 \mu\text{m}$, wind speed of $2 \text{ m}/\text{s}$ and liquid water content of $0.1 \text{ g}/\text{m}^3$, the use

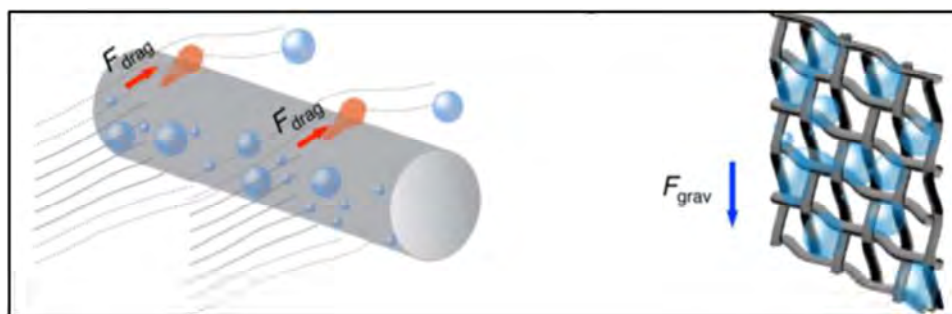


Figure 7. Factors affecting fog harvesting and reducing the collection efficiency are (a) the re-entrainment of collected droplets in the wind and (b) blockage of the mesh. Adapted with permission from [6] Copyright (2013) American Chemical Society.

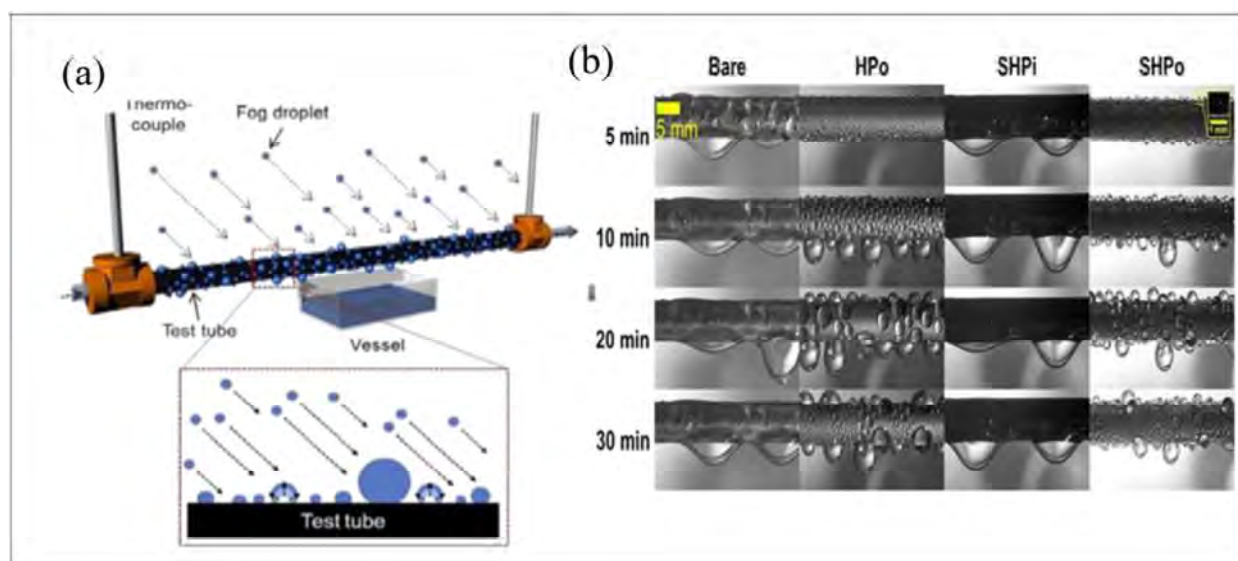


Figure 8. (a) The schematics of the experimental arrangement and (b) the photos of different materials used to the test surface wettability in fog harvesting with the water droplets [30].

of optimal dip-coated mesh surface can collect ~ 2 l of water over an area of 1 m^2 in a day [6].

Seo et al. [30] have investigated the effects of surface wettability for both fog and dew harvesting. Their approach to fog harvesting involves different test surfaces. A commercially available copper was used in various wetting characteristics, see Figure 8b. The wettability of surface is determined by the contact angle of the liquid on the surface where the liquid-vapour meets the surface. When a droplet is flowing, the contact angle (Figure 9) can be classified as advancing or receding. The researchers showed that the moisture harvesting performance was determined by the combination of the moisture capture at the surface and the removal of the captured water from the surface. In their study, they found out that a large receding contact angle is a determining factor in performance. Among all the surfaces tested, the oil-infused surfaces with their large receding contact angle at a high supersaturation condition exhibit the best fog harvesting performance.

Azad et al. [32] compared the fog collection performance of three different categories of mesh sample for fog collection performance:

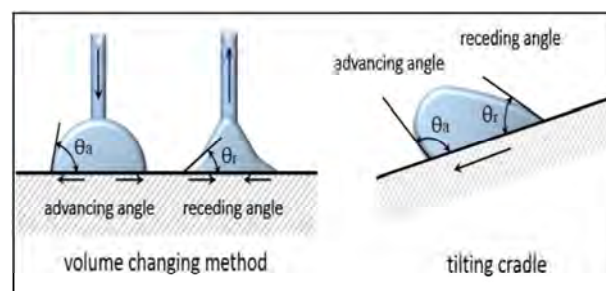


Figure 9. Schematics represent advanced and receding angles from Weistron [31].

- i. Surfaces with fine microstructures and different coatings can have markedly different wetting behaviours than smooth surfaces. Therefore, in their research, they have investigated smooth and microgrooved copper wire with a diameter of 1.2 mm. They created the microgroove surface using a sandpaper. Then, microgrooves were implemented on the wire surface using Korn 80 sandpaper that contains

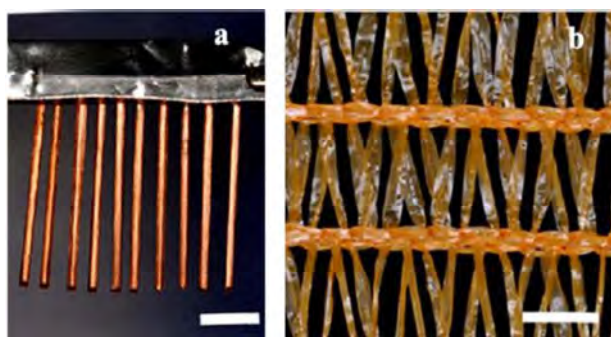


Figure 10. (a) Copper comb sample and (b) polyolefin mesh (double layered) scale bar 1 cm [32].

particles with the diameter of 190–265 μm . Illustrated in Figure 10a, the copper wires (10 of them, with smooth and microgrooved structure) were soldered electrically on a wire stick.

- ii. Polyolefin mesh samples that comes in three types, hydrophilic mesh (attract water), superhydrophilic mesh that was dip coated with an aqueous TiO_2 solution and dried at room temperature for 48 hours and ‘hydrophobic mesh’ (repel water) that were prepared by dip coating the polyolefin mesh with a hydrophobizing agent and dried at room temperature for 48 hours.
- iii. Epoxy replication (replica) to replicate surface microstructures of *Gunnera* and *Dendrocalamus* under leaf surfaces and a smooth glass (microscope slide). The glass replica had a smooth surface, the *Gunnera* replica had a convex shape microstructure and random channels with hairs inside of the channel and the *Dendrocalamus* replica had microgroove surface.

It was found that the amount of collected water by superhydrophilic mesh was five times higher than the hydrophilic polyolefin mesh. Whereas water collection by hydrophobic mesh was 2.5 times higher than the hydrophilic mesh. In the microstructured replica, water dripped 2–3 times higher than unstructured replica and smooth surface. In addition, the water was collected more quickly for the micro-grooved copper wire than smooth wires [32].

Rajaram et al. [33] studied ways to improve the capacity of fog water collection by modifying the surface and geometrical shapes of Raschel mesh structure as shown in Figure 11. The surface modification includes coating the mesh using superhydrophobic coating such as Teflon, ZnO nanowires, NeverWet and hydrobead. In general, when compared with the uncoated Raschel mesh, the use of the coatings gives about 50% enhancement in the collection efficiency given by equation (3). Meanwhile, in terms of the modification to the geometrical shapes, they have increased the shade coefficient of the Raschel mesh by developing a new manufacturing method via a punching process. That has resulted in reduction in the pore size and also the increase in the distance between two inclined filaments. The change in the geometrical

shape leads to another 50% of enhancement. In general, both methods have collected water about two times that of a typical Raschel mesh.

2.2. Biomimicry-inspired fog water harvesting

2.2.1. Animals and plants with special characteristics in harvesting water from the ambient

In parts of the world, despite extreme water shortages resulting from the low annual rainfall, animals have evolved to survive in such conditions by acquiring special characteristics that allow them to collect water from the fog or the atmosphere. Namib desert beetles, such as *Stenocara gracilipes* (Figure 12), for instance, survive by collecting water although the annual rainfall is only 12 mm [34, 35]. The surface of the beetle’s back is covered with a random array of smooth hydrophilic bumps and microgrooves ~ 0.5 mm in diameter and arranged at 0.5–1.5 mm intervals. These bumps on the forewings are micro size (in micron dimension) allowing water to condense and trickle directly to their mouth. Both fog and dew water harvesting efficiency are said to increase with the combination of hydrophilic (water attracting) and hydrophobic (water repelling) areas.

Other water harvesting animals are a lizard species known as *Moloch horridus* [36] (Figure 13). The lizard species is native to hot and arid regions, which drinks water droplets collected over its hydrophilic skin and that reach to its mouth by capillary action. In contrast, a spider, *Uloborus walckenaerius* uses its web (Figure 14) to collect water. A special structure formed a combination of its spindle-knot structure and the web joints. As seen in Figure 15, the spindle knots have rough surface and the joints have nanofibrils that make it less rough. The transportation of the water droplets towards the rough spindle-knots from the joints is promoted by the driving force resulting from the Laplace pressure gradient and surface structural anisotropy [37].

Plants are also able to survive in arid climates by harvesting water. An example is the endemic Namib desert grass called *Stipagrostis sabulicola*. The round shape of the plants’ stem are covered with leaves whose surfaces are hydrophilic and have an irregular construction. The water droplets travel from the leaves onto the roots (Figure 16) via grooves along its cone-shaped structure. A combination of surface roughness, prickle hairs and wax prevent the scattering of water droplets [39].

Many of the cactaceae (cactus) family living in hot and arid regions also show great tolerance to water scarcity and capable of water harvesting [40]. One species, *Opuntia microdasys*, from the Chihuahuan Desert, has several characteristic with properties that provide effective fog collection [41]. It has hair-like needles (glochids) instead of spines on its large green leaves, thus reducing exposure to sunlight, which limits the evaporation of water, thus causing more storage of water. In this way, more water is stored for longer survival [42].

The water collection mechanism of *Lychnis sieboldii*, a plant species from dry grassland in Japan has surface hairs that show morphological changes when in contact with water, [43]. The microfibrils in the hairs play a vital role in absorbing and releas-

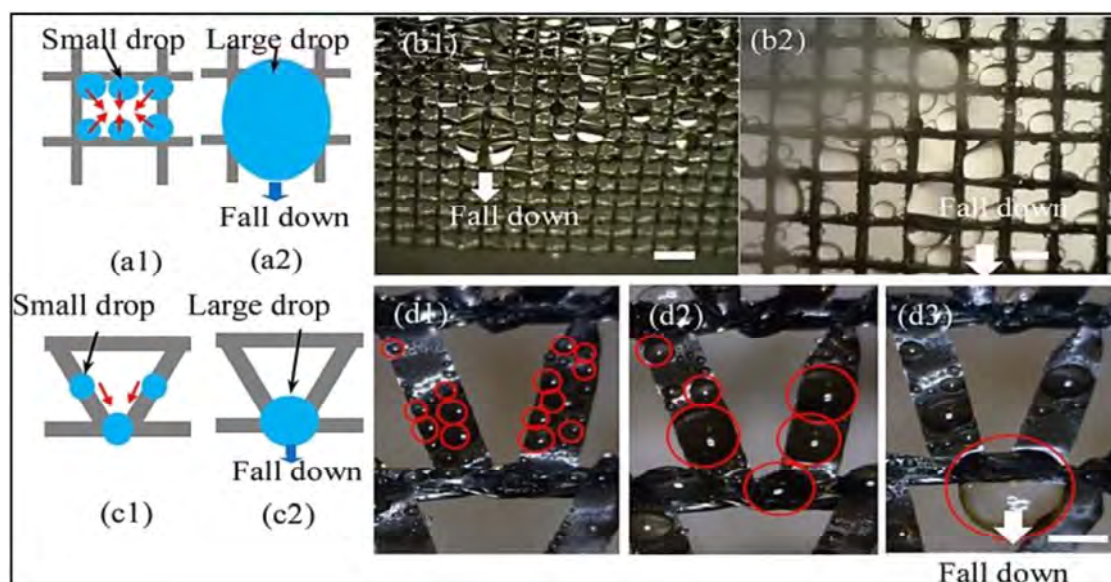


Figure 11. Illustration and experimental results of mist flow (optical images) on two rectangular Rachel meshes with cylindrical fibres (real images) conducted by Rajaram et al. [33].



Figure 12. Fog-basking behavior of a Namib desert beetle. Courtesy of James Anderson/NSF/Creative Commons BY-NC-SA 2.0.

ing water by becoming cone-shaped when exposed to water but changed to a perpendicularly twisted shape under dry conditions as shown in Figure 17.

A small desert moss, *Syntrichia caninervis* from the Great Basin in the western United States and the Gobi Desert in China, also survives arid conditions by condensing water using its hairs. The water condensation and the droplet formation are promoted by the grooves and barbs on the hair surfaces. The condensed water droplets will then travel from the tip to their base [44].

2.2.2. Biomimicry approach in atmospheric water harvesting

In recent decades, reports on bioinspired water harvesting have emerged rapidly [45]. Inspired by the Namib beetles, Garrod et al. [35] have investigated the influence in the degree of hydrophilicity/hydrophobicity of beetle backs in determining their overall micro-condensation efficiency. In this research, the micro-

condensation efficiency of fog water harvesting units has been explored in terms of the chemical nature of the hydrophilic 'pixels' and their dimensions. Imitating the pattern on the back of the beetle, they have applied plasma deposition method to make a hydrophilic polymer array on a superhydrophobic background. The performance of the surfaces as microcondensers were investigated by measuring the amount of water collected from a fine mist in 2 hours. The bumpy array patterns of the hydrophilic and hydrophobic surfaces are concluded to be more efficient at collecting suspended water droplets than a pure hydrophilic or hydrophobic surface. The amount of water collected by surfaces with bumpy array is more than 50% higher than the smooth surfaces.

To imitate the hairs of the cactus and its surface, Cao et al. [46] investigated a large-scale fog collector through integrating cactus spine-like, hydrophobic, conical micro-tip arrays. The tip arrays were arranged on a spherical hydrophobic cotton matrix, see Figure 18a–d. For the fog collector, about 30–40 micro tips were placed at each edge of the artificial cactus at 4~5 mm distance, see Figure 18a and b. The experimental set up is shown in Figure 18d. The distance between the fogging jet and the collector was set at 3 cm. At fog velocity of 45~50 cm/s, the biomimetic cactus-inspired fog collector was reported to harvest ~3 ml of water in 10 minute. The results imply that at this wind speed, 100 cactus-like fog collectors will be able to collect the water in 1.5 hours, sufficient drinking water for human survival. Clearly, a promising device for collecting water in foggy regions.

More research on bio-inspired plants was conducted by Gürsoy et al. [47] who replicated the surface of the *Eremopyrum orientale* leaf, which displays an asymmetric-anisotropic directional mist collection behavior underpinned by macroscale grooves, microscale tilted cones (tilted in the direction of water flow)



Figure 13. *Moloch horridus* lizard and the hydrophilic surface [36].



Figure 14. Water droplets on spider web [38].

and nanoscale platelets to harvest water. The surface replication, achieved using soft lithography combined with either nanocoating deposition or functional nanoimprinting, was shown to be highly-efficient for directional mist collection, compared to mist water harvesting by flat surfaces. In a different study, Gürsoy et al. [48] have reported that non-woven and cotton fibrous materials are shown to mimic the fog harvesting behaviour of *Salsola crassa* hairs, see Figure 19. In order to enhance the overall mist collection efficiency, they incorporated multiple length scale (hierarchical) channel structures and tune the surface wettability by introducing hydrophobic functionalization of the fibres (in order to mimic the leaf waxes of the plant *Salsola crassa*) using initiated chemical vapor deposition surface coatings or plasma-enhanced chemical vapor deposition. The overall mist collection efficiency can be enhanced by over 300%.

An interesting fog water harvesting concept has been demonstrated by Park et al. [49] on the design of the fog water harvesting surface bioinspired by combining three different elements from different species: Namib desert beetles, cacti and pitcher plants. Inspired by the bumpy surface of Namib desert beetles, they have performed modelling to optimize the radius of curvature and cross-sectional shape of the water harvester surface to promote condensation. Then, inspired by cactus spine, they integrated the geometry with a widening slope in facilitating water droplet to

the collector in a faster rate to avoid a decrease in the droplet size. Finally, they integrated the optimized bump radius and the wide slope structures with a slippery nano-coated surface that is inspired by pitcher plants. The role of the slippery surface is to promote coalescence droplet growth.

Shang et al. [50] mimic the special characteristics of the spider web silk in order to harvest water. In their research, they have developed a novel microfluidic technology that can control the size and spacing of the spindle knots in order to adjust the flow rates. In this way, the size and spacing of the spindle knots can be controlled and thus, the function of humidity-responsive water capture can be obtained. As a result, some features are gained such as thermally triggered water convergence, humidity-responsive water capture that can be used for many applications.

3. DEW WATER HARVESTING

In fog water harvesting, the collection of water will occur when the fog droplets impact and intercept with the collection surfaces. However, the main limiting factor of harvesting water from the fog droplets is the global fog occurrence that is highly dependent on the geographical and metrological factors or conditions. Only limited number of places experience environmental conditions whereby the temperature of moist air could naturally drop below its saturation temperature thus form fog. Not surprisingly therefore, on a global scale, fog is reported to be even less accessible than seawater as an alternative source of freshwater [51]. Water vapour is ubiquitous in the atmosphere, so, if condensed by cooling, freshwater can be harvested at many locations. Nevertheless, the condensation process is more thermodynamically complicated than fog harvesting and as reported in Gido et al. [51], the process involves a significant release of heat.

Water droplets that are formed due to the condensation of water vapour on a surface at temperature below its dew point temperature are called dew water [3, 52]. In this paper, dew water harvesting processes are divided into three categories: i) passive (radiative) cooling condenser, ii) solar-regenerated desiccant and iii) water harvesting from air using active cooling condensation technology. This review includes dew water collection under both high and low humid air conditions.

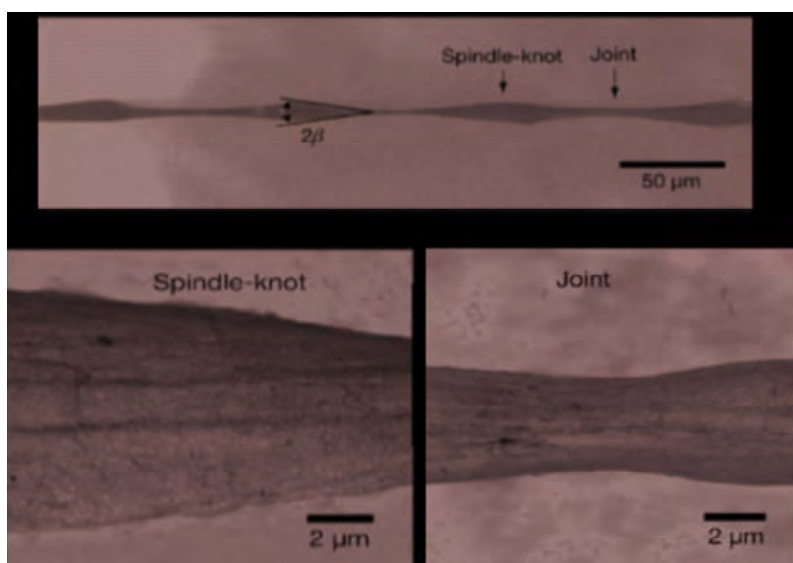


Figure 15. Structure of the spindle-knot and joint [37].



Figure 16. *Stipagrostis sabulicola* in their natural habitat [39].

3.1. Water harvesting using radiative cooling condenser (passive systems)

The principle of radiative cooling condenser is very simple. Inspired from dew formation on plants in the morning, the formation of dew is driven by radiation phenomena of the surface of the materials. The formation of the dew is physical and determined by the surface cooling without additional energy, and the most important element being the power gradient between the condenser outgoing radiative power and the sky radiative power P [53] which is presented by the Stefan–Boltzmann law presented in equation (5):

$$P = \varepsilon \sigma (T)^4. \quad (5)$$

The radiative power per unit area P (W/m^2) also depends on the local surface temperature T (K). In equation (5), σ is the Stefan–Boltzmann constant ($\text{W}/\text{m}^2\text{K}^4$), and ε is the emissivity of the surface. Thus, to optimize the dew formation, as reported in [52] cited in [3], one could:

- (i) maximize the infrared wavelength emitting properties of the surface to allow surface cooling at night;
- (ii) increase the reflectivity of the condensing surface to ensure that the surface will not trap heat that will warm the condenser and resulting in evaporation during the day;
- (iii) reduce the wind effect to the condenser by tilting the condenser surface;
- (iv) increase the hydrophilic property of the surface, and this can be achieved by applying hydrophilic coating to the surface and lastly;
- (v) reduce the heat inertia of the condensing surface to promote change in temperature difference and also as a means to avoid heat transfer from the ground.

Studies on passive cooling system include investigation on materials with low emissivity surfaces. Early study on the influence of condensing surface materials to the dew formation has been investigated for Bahrain climatic condition [54]. Three materials: aluminium, glass and polyethylene foils were investigated as the condensation surfaces. From their study, aluminium surfaces were reported to have the highest amount of average dew collected at $3 \text{ kg}/\text{m}^2$ per hour, followed by glass and polyethylene foils at 0.8 and $0.3 \text{ kg}/\text{m}^2$ per hour, respectively. Three different types of condensing surface namely: i) galvanized iron (GI) sheet with emissivity 0.23 and thickness 1.5 mm , ii) commercial aluminium sheet with emissivity of 0.09 and thickness 1.5 mm and iii) PETB film (polyethylene mixed with $5\% \text{ TiO}_2$ and $2\% \text{ BaSO}_4$) UV stabilized with emissivity 0.83 and thickness 0.3 mm have been investigated, see Figure 20 [55]. The condensing surfaces were tested as a radiative condenser at $1 \text{ m} \times 1 \text{ m}$ in size installed at the village of Kothara ($23^\circ 14 \text{ N}$, $68^\circ 45 \text{ E}$, 21 m a.s.l.) that is a part of the semi-arid coastal region of northwest India. The aim of the project was to use the water harvesting system as a solution to drinking water problem in that region that is well known with

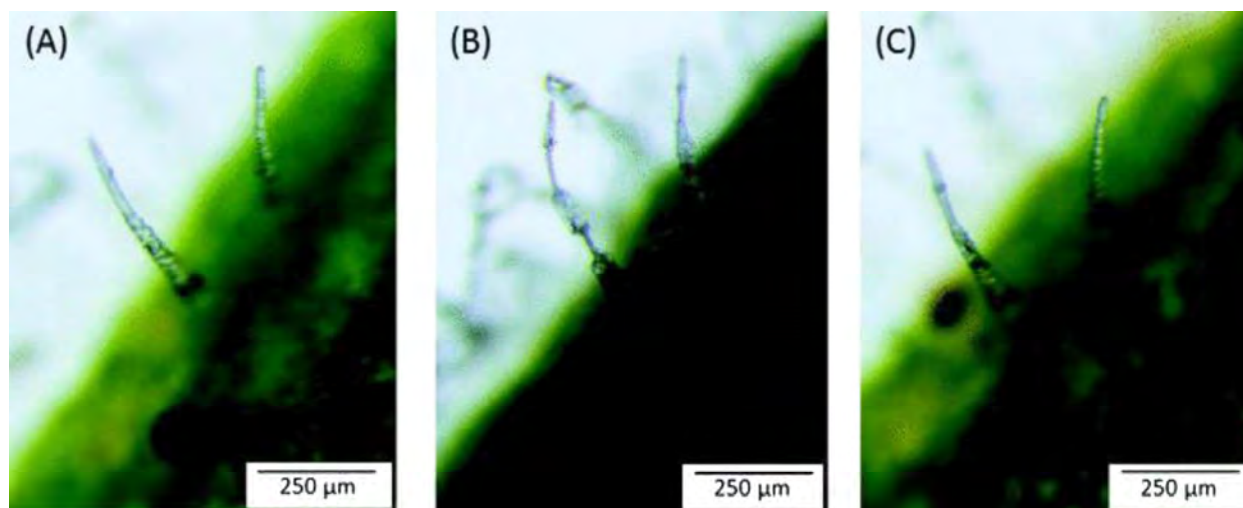


Figure 17. The morphology changes of hairs on the leaf of *Lychnis sieboldii* [43].

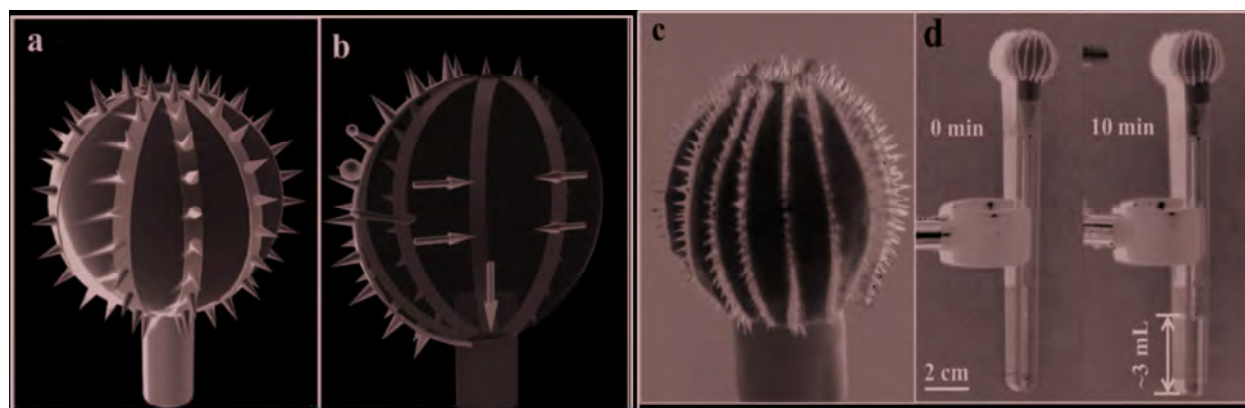


Figure 18. The illustration of the (a) cactus-inspired device and (b) the water transportation pathway in the device. (c) The photographs of the cactus-inspired continuous fog collector and (d) the photographs of collection process of the device [46].

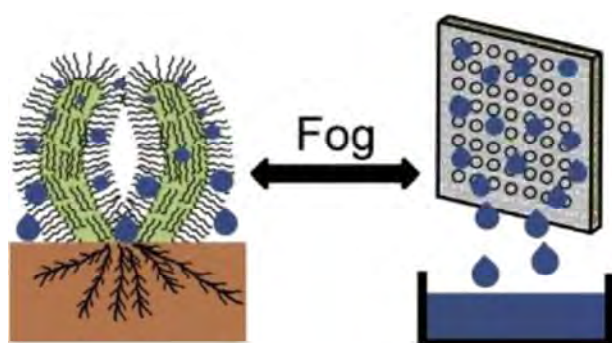


Figure 19. 'Fog collection mechanism of *salsola crassa* plant species and bio-inspired fibrous water harvesting' [48].

poor groundwater quality. From the daily data collected over 2-year period in 2004 and 2005, the quantity of water collected on most (60%) nights varied more or less uniformly between 0.05 and 0.25 mm and there were two peaks. The peaks that

one of them centred over March–April (summer) and the other over October (fall) shows water collection of 0.55 mm. From all the three surfaces being tested, the highest collection was in the PETB units (19.4 mm) followed by GI (15.6 mm) and aluminium (9 mm).

Kothara village in the Kutch region now has India's first potable large-scale water production plant designed to harvest atmospheric moisture and process it into drinking water. The condensers were made of planar panels using high emissivity plastic film insulated underneath that promotes cooling. In addition to dew water harvesting, the condenser are also capable to collect rainwater. It was reported that the expected cost of 1 l of bottled water is 0.5 rupee with the expected yield of filtered, treated potable water from the plant is 150 000 litres a year [56].

Another important surface parameter that influences the performance of the passive system is the shape of the radiative condenser. As reported in Khalil et al. [3], among the early researchers who investigated various shapes of these passive condenser



Figure 20. Different types of condenser surfaces investigated by [55].

surfaces were Jacobs et al. [57] who investigated an inverted pyramid shape. Investigated at the grassland of the Netherlands, the authors concluded that their collector collected water 20% more than the planar shape at angle 30° . Researchers [58] have performed a CFD simulation Computational Fluid Dynamics using PHOENIX to simulate the innovative designs proposed in their study.

Reported in 2011, the world's largest dew and rain water collecting system was constructed in 2006 at Panandhro in the semi-arid area of Kutch (NW India). Ridge-and-trough shape modules have been chosen as the shape of the dew water collector [59]. The performance of the large dew condenser at 850 m^2 net total surface with 10 ridge-and-trough modules had a total output for 2007 of 6545 l, corresponding to 7.7 mm/day on average. The maximum collection rate reported was 251.4 l/night (0.3 mm). In addition to dew, the designed condenser could also collect rain (and, to a lesser extent, fog).

In a passive system, natural convection between the condenser surface and the air flow is not favoured since it will reduce the condensing efficiency of the condenser system. Thus, a condenser in a hollow form such as a funnel will reduce the free convection along the surface since the heavier cold air will remain at the bottom of the funnel due to gravity regardless of the wind direction [53]. The researchers have performed both simulation and field studies. From their simulations, cone angle $\approx 60^\circ$ give the best condenser cooling efficiency. Based on experimental work and field testing, a repetitive pattern of hollow shapes to pave a planar or weakly curved roof surface, have been considered, providing pleasing aesthetics and construction cost advantages. The egg-box and origami types were specifically investigated. The prototypes were fabricated and installed at Les Grands Ateliers (Villefontaine - France) during the 'Chaleurs urbaines' project (ENSA de Grenoble - M tro).

3.2. Solar regenerated desiccant in water harvesting (passive system)

Low yield is a key issue for the passive, radiative condenser system because of its dependency on certain parameters, notably the sky emissivity, the amount of water vapour in the air (relative humid-

ity), wind speed and topographic cover [3]. Desiccant materials such as silica gel, zeolites and CaCl_2 are hygroscopic and can absorb moisture through adsorption and absorption process thus increasing the amount of the dew water collected. As a result, desiccant beds are now commonly being used in atmospheric water harvesting applications. Figure 21 presents the generic process of atmospheric water harvesting using desiccant. The process may be explained as follows: the first stage is water absorption stage at night where the desiccant bed will absorb moisture from humid air. The second stage is water desorption during the day by heating the bed with solar radiation, which will regenerate the desiccant by driving out water vapour. In the third and final stage, the evaporated water will then condensed into water droplets and collected in a tank.

The advantages of a desiccant system over radiative condensers include the hygroscopic capacity of the desiccant that enables more efficient water collection, achieving low dew points without the risk of freezing thus reducing operational cost [51]. Early studies on solar regenerated systems involve desiccants such as saw dust [61], silica gel [62] and recycled newspaper [63]. In a patent, Ackerman [64] claimed a spiral water harvester containing hydrophilic particles such as silica gel and tilted at an angle that optimized water collection. To improve the atmospheric water harvester performance, various collector designs have been investigated by researchers and several are described below.

3.2.1. Glass pyramid collector

Kabeel [65] described a glass pyramid collector (Figure 22) comprising: i) desiccant beds on shelves, ii) a slanting wall cover, iii) a collection cone and iv) a condenser section mounted on top of the pyramid, shading it from solar radiation. Sawdust and cloth, saturated with CaCl_2 , were investigated as the desiccants. The covers over the beds are open overnight so the desiccant can absorb water vapour from the air. During the day, the covers are closed so the beds are heated by solar radiation driving off the absorbed water, which condenses on the sides and especially at the pyramid apex water, where it is collected by a central cone and flows through a tube to an external container. The reported water yield is 2.5 l/day/m^3 ; the cloth bed showed better performance than the sawdust bed system.

3.2.2. Corrugated surface

Based on the principle of desiccant moisture absorption at night and simultaneous desorption (regeneration using solar energy) and water vapour condensation during the day, Gad et al. [66] introduced the use of an integrated desiccant/solar collector to harvest water from humid air. In their study, a small air circulation fan was used to force the ambient air to enter the glass-enclosed solar collector during the evening (Figure 23). In the collector, a thick layer of corrugated cloth was used as the desiccant bed. The use of corrugated surface was meant to increase the heat and mass transfer area during the absorption/desorption mechanism. During the day, water vapour condensation will occur on the

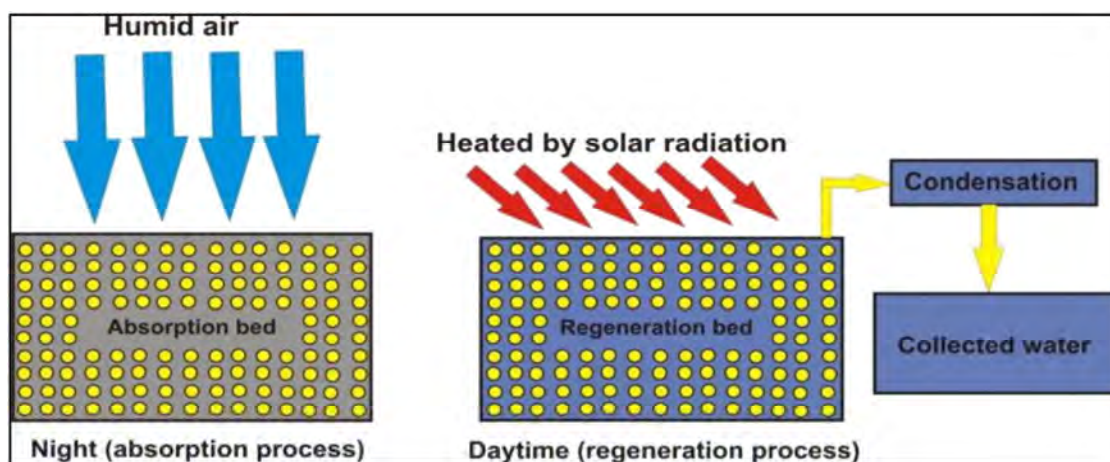


Figure 21. Wet desiccant technique for water production from atmospheric air [60].

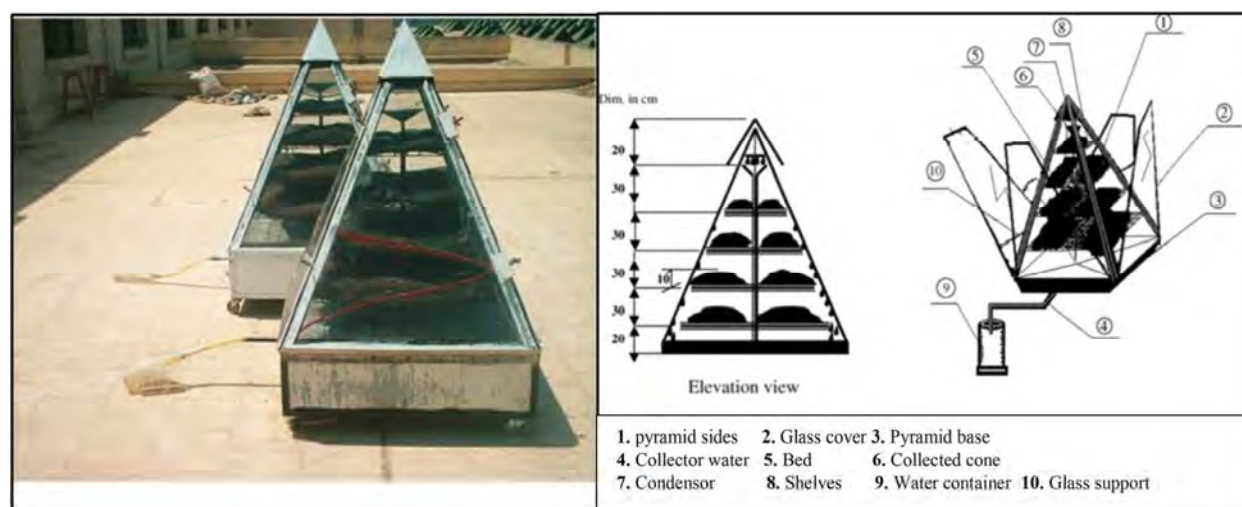


Figure 22. (a) Photograph of the system used. (b) Pyramid with glass covers open at night (right) [65].

inner surface of the glass enclosing the solar collector. According to the researchers, the solar driven system could produce 1.5 l of fresh water per square meter per day.

3.2.3. Trapezoidal prism

William et al. [67] designed a trapezoidal prism with CaCl_2 as the desiccant (Figure 24) supported on sand and on dark cloth. For the prism wall, transparent fibre glass bolted to aluminium frames was used while the top of the prism was an opaque material that acted as a condenser and to facilitate collecting the condensate water, the walls were slanting. The trapezoidal prism worked in essentially the same way as the pyramidal system described above in that moisture absorption occurred at night time and the solar radiation driven desorption occurred during the day with the evaporated water forming water droplets that collected in the water tank. The system efficiency was computed by considering the total heat of evaporation to the total incident solar radiation

during the day time. The recorded daily total evaporated water for cloth and sand bed achieved a maximum of 2.32 and 1.23 l per m^2 at system efficiency of 29.3% and 17.76%, respectively.

3.2.4. Solar glass desiccant box type system

In India, an atmospheric water harvesting system that named 'solar glass desiccant box type system' (SGDBS) with a capture area of 0.36 m^2 was developed and investigated. The box was made of a 3 mm single glaze glass; the desiccant bed was fixed at 0.22 m at inclination of 30° . The desiccant bed was a composite material using sawdust impregnated with CaCl_2 (Figure 25a, absorption and Figure 25b, desorption). Three boxes were tested under the Indian climatic conditions at NIT Kurukshetra, India [$29^\circ 58'$ (latitude) north and $76^\circ 53'$ (longitude) east] in October. The researchers observed that the performance depend mainly on the concentration of CaCl_2 , which generated 180 ml/kg/day at a loading of 60% on the sawdust.

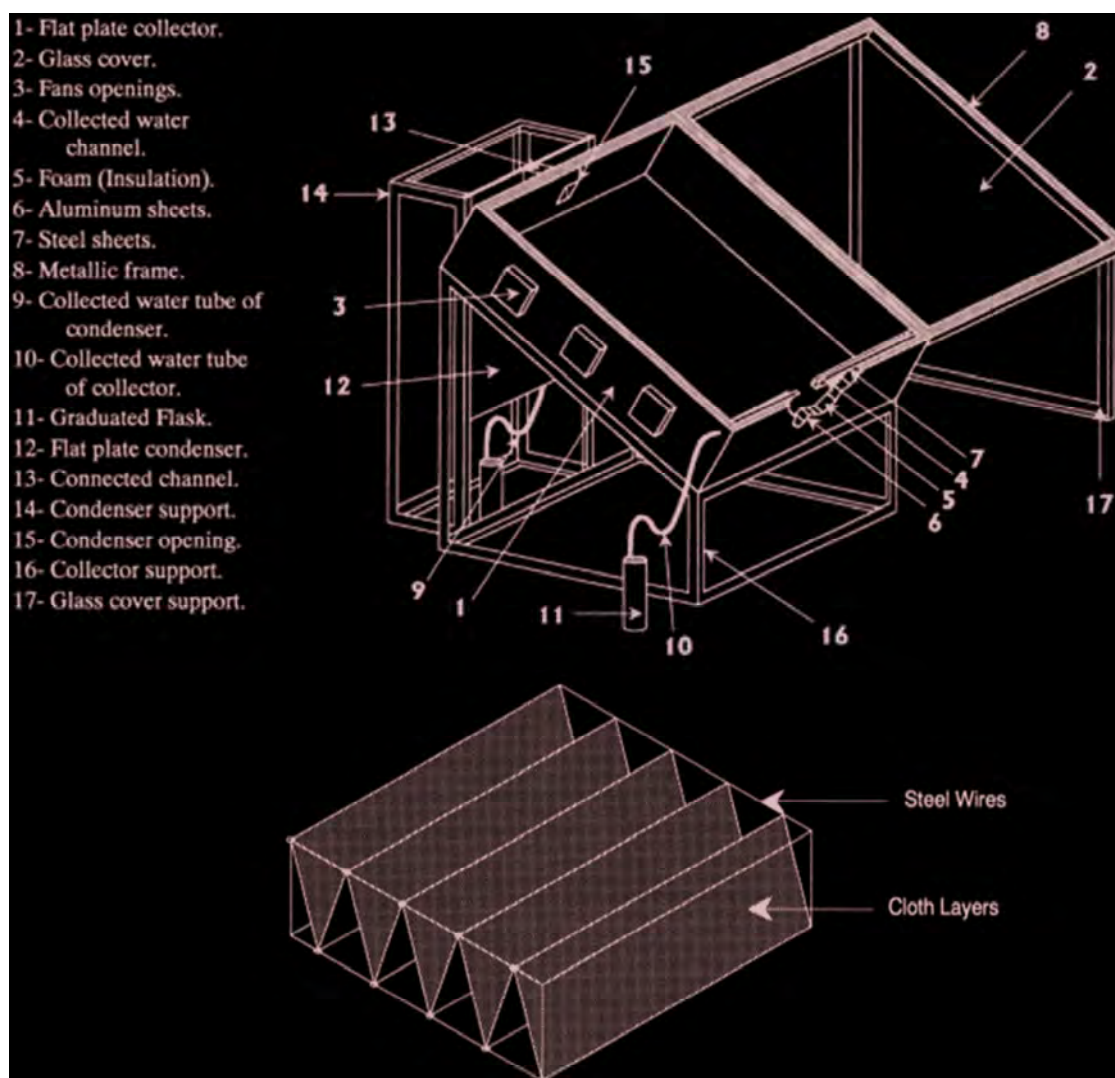


Figure 23. Schematic diagram of the experimental apparatus and the corrugated desiccant bed [66].

3.2.5. MOF porous metal-organic framework-801

Recently, the potential of harvesting water from humid air as low as 20% have been investigated by researchers from Berkeley and MIT [69]. Based on the same principal of introducing hygroscopic element to improve moisture uptake, the researchers have developed an hygroscopic sheet using a kilogram of dust-sized MOF porous metal-organic framework-801 $[\text{Zr}_6\text{O}_4(\text{OH})_4(\text{fumarate})_6]$ crystals pressed into a thin sheet of porous copper metal positioned between a solar absorber plate (at the top) and a condenser plate (see Figure 26), both placed in a chamber [70].

The device is shown in Figure 26. At night flaps are open, allowing ambient air to enter the chamber. Water vapour diffuses into the porous MOF and is absorbed on its internal surface in clusters of eight molecules, essentially tiny ‘cubic droplets’. In the morning, with the chamber closed, natural sunlight ($\sim 1 \text{ kW/m}^2$) heats MOF causing the water to desorb as vapour, which then condenses on the bottom of the chamber [70] and the resulting liquid drains

to a collecting tank. Published results suggest that MOF-801 is superior to other absorbents, being capable of generating 2.8 l of water per kg and with the ability to operate a relative humidity level as low as 20% [70].

3.3. Water harvesting from air using active cooling condensation technology

The water harvesting systems described previously can be described as ‘passive’, i.e. they are driven simply by solar heating and do not require the input of electric or other high-grade power. In contrast, ‘active’ systems typically require electrically powered compressors or vacuum pumps and the quantity of water harvested is directly related to the input energy [3]. Active harvesters range in scale from those suitable for domestic drinking water (15–50 l per day) to industrial scale units for irrigation (2000 l per day), outputs typically significantly larger than passive systems. The power consumption per kilogramme

No	Description
1,2,3	Temperature measuring points in each fibreglass side
4	Thermocouple selector switch position
5	Roof surface temperature measuring point
6	Top bed temperature measuring points
7	Middle bed temperature measuring points
8	Bottom bed temperature measuring points
9	Collecting surface for condensed droplets
10	Collected water tank

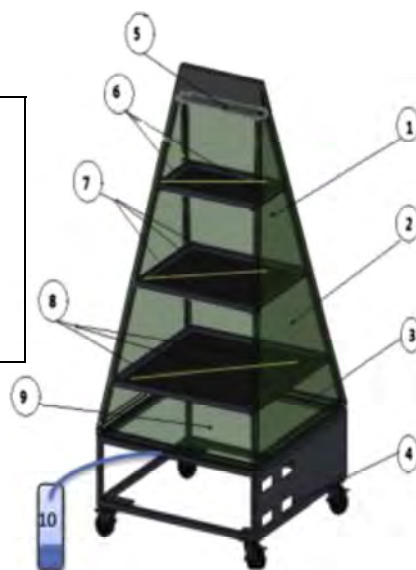


Figure 24. Schematic diagram of experimental test rig [67].

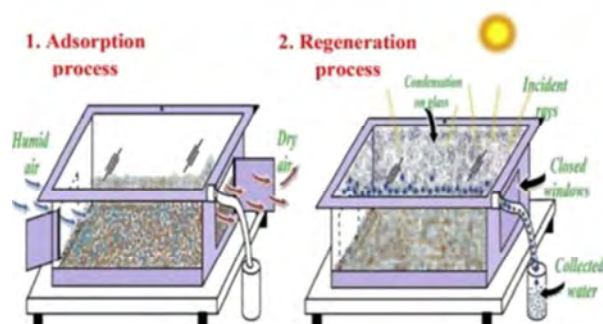


Figure 25. (a) and (b) the design of the SGDBS and (c) the experimental setup [68].

of water collected is a major concern for active systems and will be affected by the ambient temperature, humidity and efficiency of 'coolth' recovery in the equipment. Leading active technologies are described below.

3.3.1. Dehumidifier using selective membrane

Water vapour is only a minor component of air in the atmosphere, even at 30°C/100% RH only 30.4 g is present, while at 10°C/RH 100% the moisture content is 9.4 g/m³, so the maximum quantity of water that can be recovered by cooling between these temperatures is 21 g/m³. However, this requires cooling 1 m³ of air by 20 K that requires the removal of 24 kJ of heat plus 52.5 kJ of latent heat to condense the water. If the coolth of the outgoing air after condensation is not recovered, it represents a significant inefficiency. To minimize the power requirement of the dehumidification process, as shown in Figure 27, researchers [71, 72] have used water vapour selective membranes to separate the water vapour component prior to cooling and condensation, thus avoiding cooling the other atmospheric gases. The key element

of the system is the water-selective membrane that allows only water vapour to pass through driven by a concentration gradient imposed by the vacuum pump. The concept underlying the membrane system is shown in Figure 28 in a different study by Woods [73]. The researchers [74] found that with a 62 kW power input, the harvester produce water at the rate of 9.19 m³/day, a 50% better efficiency than the equivalent system without the membrane. In addition to improved energy efficiency, the selective membrane generated fresh water that cleaner than water condensed directly out of the air. Other than selective membranes, some researchers also use desiccants systems (liquid and/or solids) to absorb the water vapour from an incoming air stream. However, these methods require regeneration steps and cyclic operation conditions reduce the rate of water production. Furthermore, the use of spatially separated liquid desiccant dehumidification methods results in energy-intensive regeneration and condensation processes [75].

Various selective membranes have been investigated. A Singapore group investigated water vapour permeation through

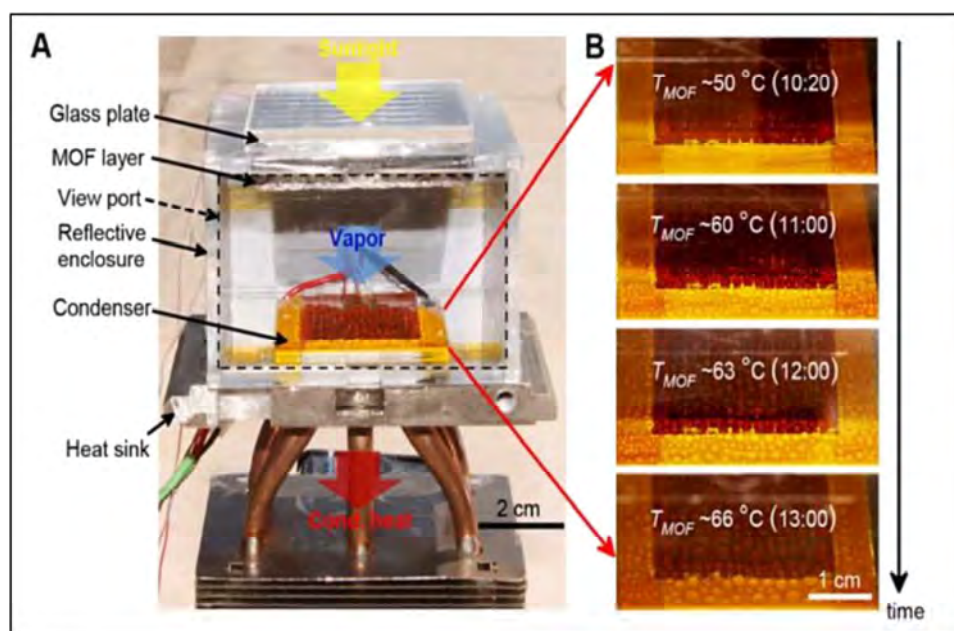


Figure 26. The experimental setup [70].

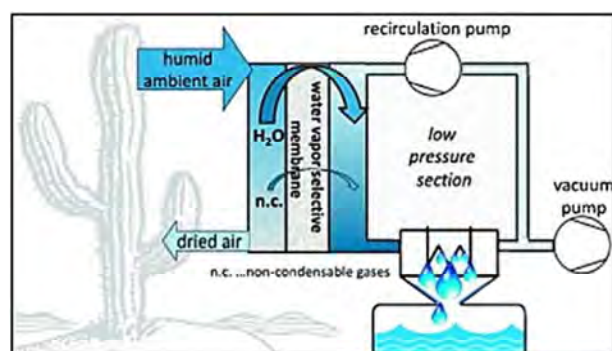


Figure 27. The representation of the water vapour selective membrane in an atmospheric water harvesting system [74].

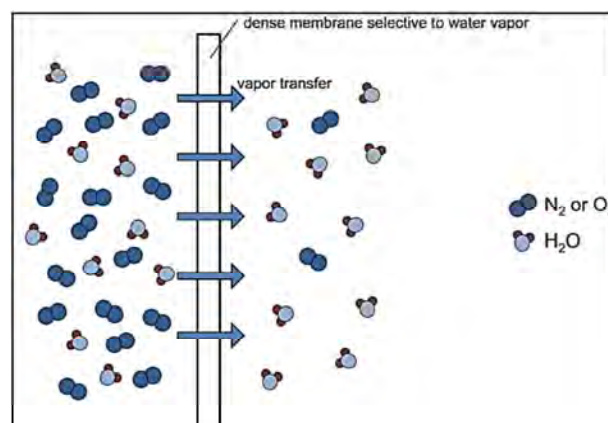


Figure 28. The concept of water vapor selective membrane [73].

membranes fabricated by impregnating poly(vinyl alcohol) (PVA) with LiCl [76]. They concluded that higher LiCl contents and lower temperature optimizes the water vapour permeance of the membrane. With respect to humid condition, the tests showed that the membrane was suitable for dehumidifying air at high humidity conditions.

In a separate publication, the group compared two different membranes, one containing LiCl and the other triethylene glycol (TEG) supported on PVA. The researchers concluded that the water vapour permeability of the membranes increased with increasing amounts of the hygroscopic component (LiCl or TEG), because it lowered the diffusion energy and thus the barrier to permeation. The researchers further claimed that a membrane with PVA/TEG is highly durable, has less corrosive problems and more environmentally friendly in comparison to the membrane with LiCl as the hygroscopic component [77].

3.3.2. Atmospheric water harvesting integrated with air conditioning system and condensing coil

Active condensing systems, using the conventional reverse Rankine cycle, operate in the same way as a dehumidifier where passage of moist air passed over a coil cooled by a refrigerant, causes the water vapour to condense. The rate of the water production depends mainly on the relative humidity and the air temperature. Versions of the technology have been described in various academic papers and patents. For example, Lukitobudi [78] claimed a mobile dehumidifier unit that simultaneously produced drinking water. Sawyer and Larson [79] who presented a disclosure unified system that provides both air conditioning and atmospheric water harvesting. Magrini *et al.* [80] have discussed in their paper the advantage of water harvesting from the integration with an HVAC



Figure 29. Ecolo Blue EB30 [82].



Figure 30. Atlantis H2O Elite Atmospheric Water Generator [83].

system that also serves as the air conditioning system for a hotel in a sub-tropical arid climate. Rather than having the condensate water from an HVAC system wasted, the water is collected and utilized. The researchers found that the integrated system water produce $\sim 56\%$ of the hotel water daily demand.

Another study into water harvesting from an air conditioning system has been recently conducted by Dalai et al. [81] to maximize the amount of water vapour captured by a window air conditioner, a process termed 'atmospheric water vapour processing' (AWVP). The water was claimed to be sufficiently good quality for human consumption. With a power input of 160 watt and air flow rate of $0.00623 \text{ m}^3/\text{s}$, the amount of water collected was reported to be as high as 1025 ml.

Ecolo Blue, a United States company, produces the EB30 commercial unit based on dehumidifier circuit to harvest atmospheric water (Figure 29). To minimize contamination of the water by the metals of the cooling coils, they are treated with a food grade coating. The EB30 can generate up to 30 l of water from air over a 24 hour cycle with a unit cost of 1300 US dollars.

Another company, Atlantis Solar, offer the Atlantis H2O Elite range of units providing atmospheric water harvesting from 100 l up to 10 000 l per day (Figure 30) (Atlantis [83]).

3.3.3. Thermoelectric cooling in atmospheric water harvesting

The application of thermoelectric cooling (TEC) is being actively investigated as an alternative approach to conventional Rankine cycle for water harvesting for example by Joshi et al. [84] who constructed a prototype containing 10 Peltier components (Figure 31).

To enhance the cooling performance, the researchers have introduced an internal heat sink on the cold side to increase the cooling rate and thus the condensation rate. Over a 10 hour run, the TFWG with internal heat sinks showed 81% improvement over in amount of water collected compared to the TFWG without the heat sinks. Other parameters being investigated are electric current, air mass flow rate and air humidity.

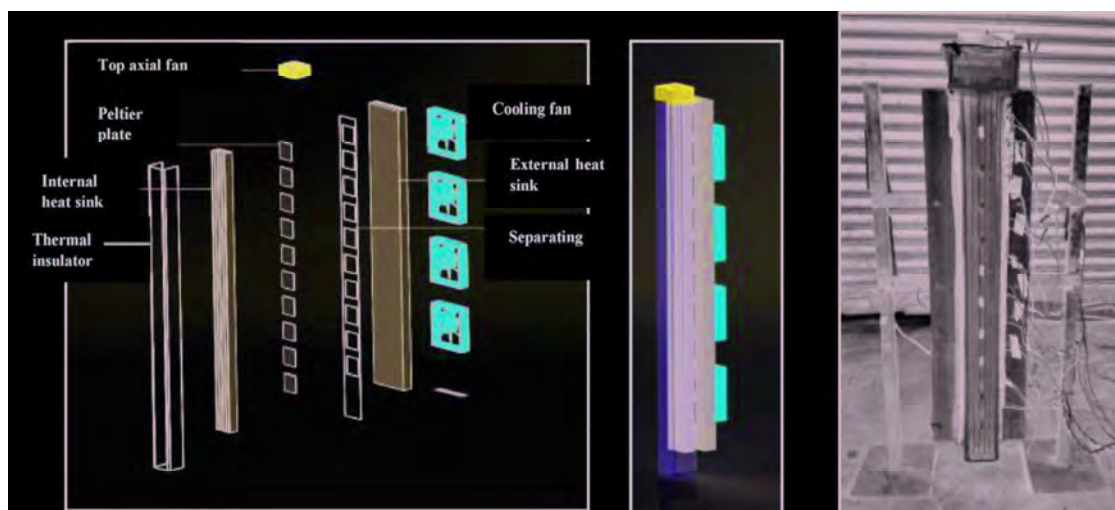


Figure 31. Left and middle: diagram of prototype and right: actual water harvester prototype [84].

Liu et al. [85] have investigated a portable water generator, with two TECs. In their system, air is forced into the mixing chamber and then humidified. The humidified air is then flow through the TECs via the inlet air channel. At TECs, the temperature of the inlet air was reduced by the cool surface of the TECs to the dew point temperature and water condensation occurs. The researchers investigated the relationships between inlet relative humidity and air flow rates with the amount of the water generated/condensed. They concluded, not surprisingly, that the higher the air relative humidity the higher the amount of water generated, while increasing the air flow rate lowered the condensation rate, possibly because the reduced contact time between the air flow and the TEC degraded the heat transfer rate. Lui et al. [85] showed that the maximum amount of generated water was ~ 25.1 g/h with 0.216 m^2 of condensation surface and 58.2 W power input.



Figure 32. Water harvesting billboard [86].

3.3.4. Innovative cooling condensation technology: concept and prototype development

Exciting developments integrate cooling condensation technology with wind energy source element. The water harvesting billboard (2013) designed by University of Engineering and Technology of Peru (Figure 32) contains five generators that extract moisture from air using an inverse osmosis filtration system [86]. The water flows through the small ducts to a central holding tank at the billboard's base. Although the billboard requires power supply, it could provide as much as 100 l of drinking water per day.

EOLE WATER have introduced the WMS1000 wind turbine (Figure 33) that harnesses wind energy to simultaneously drive the compressor of a Rankine cycle dehumidifier-type system and create an airflow over the cold coil. With an electrical output of 30 kW , the WMS 1000 can produce up to 1000 l of drinking water per day and requires no additional external electrical input [87].

Over the past decade, Australia has suffered severe droughts causing considerable economic hardship to its famers. To alleviate their plight, Edward Linacre has therefore invented the airdrop water harvester [88]. Airdrop comprises a mast-like tube above ground through which air is sucked and driven into an underground metal coil by a wind-powered turbine. Since the earth is at a lower temperature, it cools the air below its dew point resulting in water vapour condensation. Liquid water collects in a reservoir from where it is pumped to a network of irrigation tubes to the plant roots, a very efficient method of distribution since it minimizes water loss. The airdrop can harvest 11.5 ml of water for every cubic meter of air in the driest deserts such as the Negev in Israel, which typically has a relative humidity of 64% , and can produce 1 l of water per day [88]. The airdrop is a low-tech solution that could be installed and maintained easily and it is self-contained, using a combination of wind and solar power. The turbine is generally wind powered, but when wind speeds are low it is powered by solar PV buffered by a battery.

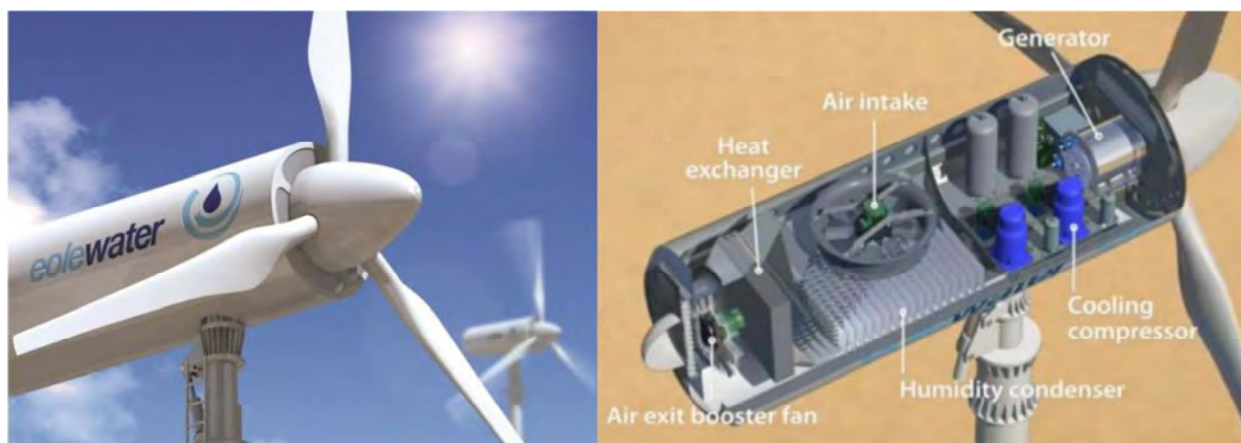


Figure 33. The WMS1000 wind turbine from EOLE WATER [87].

4. DISCUSSIONS AND CONCLUSIONS

At least 2.7 billion people worldwide experience water scarcity, a problem that is increasing and has the potential to cause conflicts between countries as they compete for an increasingly short resource. Clearly, this crisis needs tackling urgently and will be compounded as climate change causes profound shifts in rainfall patterns. Although traditionally arid regions, such as the Middle East will suffer, developed countries are certainly not immune as prolonged droughts in parts of Australia and California have demonstrated. Not surprisingly therefore, harvesting atmospheric water has received considerable attention from researchers worldwide since starting with the traditional method of capturing water from fog 50 years ago.

This review has described various technologies in rapidly developing field we expect more to appear in the near future. All have their merits and disadvantages with some being more suited than others to specific situations. Fog harvesting systems are simple, relying upon simple, relatively cheap materials that may be obtained from indigenous natural resources. However, fog only occurs in a limited number locations where rainfall is low, so can only make a modest contribution to alleviating water shortages.

Atmospheric water vapour is a world-wide resource and is available even in the driest climates. Passive harvesting devices relying upon radiative heat loss, and, like fog collectors, also have advantage of being simple and not requiring an external power source. The surface energies and topographies can be modified to facilitate the collection of water and facilitating drainage. However, long term testing is required to check whether fouling, either natural or man-made, might compromise performance over a time scale of several years. Will regular cleaning be required? The quantities of water that can be harvested by passive systems are limited and are perhaps limited to providing drinking water to small communities rather than large-scale applications such as agricultural irrigation.

Desiccant-based water collection systems are more sophisticated than radiation-based systems, but can collect more water for a given size of unit. Although cheap absorbents can be fabricated from sawdust and calcium chloride, recently developed modern metal organic framework (MOF) materials are able to operate with relative humidities as low as 20%, but will be more expensive. The choice of absorbent will be determined by economics versus technical efficiency. The desiccant systems described in this review rely upon thermal solar energy to drive the desorption process, which is not a problem since most arid areas have plentiful sunshine. Desiccant systems would benefit from fans to drive moist air over the beds on windless nights, which require solar PV cells and batteries. All the systems reviewed rely upon flaps to be opened and closed manually. Obviously, this is not a problem for an experimental system, but for a production unit an automatic vent opener typically used for greenhouses would allow water harvesting with minimum of attention. Of course, it would need to be installed to close the vent during the day and open at night, the reverse of its normal operation.

‘Active’ water harvesting units that require the cooling of air by the input of electric or mechanical energy are capable of operating from scales of few litres to 1000s litres per day and can be used for domestic water to agricultural irrigation. Whether fossil fuel or nuclear, provide the power for condensation, it is questionable whether this makes technical or economic sense since such stations require large quantities of cooling water. If such water is available why not use it directly. However, solar or wind power is readily available in an arid area, using it to harvest water is potentially attractive. Furthermore, water can be readily stored; a renewable energy installation might be scaled to supply both the power and the water for an arid locality, with water harvesting continuing when power demand was low. Water can also be used for evaporative air conditioning systems so conceivably integrated power and a/c systems might be designed. Maybe in arid climates, we shall see the construction of fully self-contained dwellings that do not rely upon any connections to public utilities? Of course,

there may more than one system installed, so that the house derives its power and water from PV cells, while the garden is watered by several 'airdrop' units scattered around the grounds. For public buildings and facilities such as golf courses and where adequate land is available, the EOLE WATER WMS1000 water unit might be attractive because of its large scale.

Water harvesters based on the reverse Rankin cycle, operating on the same principle as present-day dehumidifiers, require a conventional refrigerant. Over the past 25 years, the major refrigerants have been the Hydrofluorocarbon (HFCs), but these are now being phased-down and ultimately phased out because of the high global warming potentials (GWP). The low GWP replacements are the so-called 'natural' refrigerants, carbon dioxide, ammonia and hydrocarbons and the so-called 'synthetic' refrigerants the HFOs (hydrofluoroolefins), notably R1234yf and R1234ze(E). Ammonia and hydrocarbons have well-known hazards so increasing their applications in close proximity with the public means they must be treated with caution. Carbon dioxide is non-flammable and has low toxicity, but of necessity has to operate at high pressure supercritical conditions for part of the cycle, which presents significant thermodynamic efficiency problems. The two HFOs have low toxicity, are only marginally flammable and can operate on a conventional reverse Rankine cycle. However, they attract considerable opposition from campaigning environmentalists who strongly advocate the 'natural' refrigerants, although, as presently sourced, these are just synthetic as the HFOs being manufactured in large chemical plants. Any future work on active reverse Rankine cycle harvesters should consider what refrigerants will be available in the future. The 'airdrop' system does not rely upon refrigerants or external power, so is possible to develop a large-scale version? Maybe this is the way forward? The TEC cooling systems also avoid the need to choose a refrigerant, but are they as efficient and can they be operated at large scales?

Several of the technologies we described above are essentially laboratory studies; water harvesting technology is only now being to be commercialized. If water is being collected for drinking water then attention must be paid to potential contamination. Fog nets, passive radiation and even desiccant collectors may be fouled with algal and bacterial growth and bird droppings, so the water obtained may need to be treated before being drunk. The problem of legionnaire's disease in a/c water tanks is well known. Atmospheric pollution, such as soot particles, might also be a hazard. Comparable problems might occur with active collection devices.

Dalai *et al.* [81] recognized the need to treat the water collecting plates of their AWVP windowbox device with a coating that prevented potential contamination of the water with metals to ensure it was drinkable. This is an important point; chemical as well as natural contaminants must be considered. Standard horticultural Raschel fabric may contain additives, such as plasticisers and UV stabilisers, that would contaminate collected fog water. A food grade material might be specified, but would this survive sufficiently long in the open air? In any case, natural contamination accumulating during use might nullify the value of food

grade material. Fluorochemical coatings provide the highest water repellency so they would seem to potentially useful for water harvesting devices. However, it has been known for over 20 years that they slowly release non-biodegradable perfluoroalkylsulfonic salts that can accumulate in the fats within organisms. The use of fluorochemical coatings is therefore best avoided. For crop irrigation, potable quality water is not required so these problems are not issues, apart perhaps from the fluorinated coatings.

Water harvesting is a technology whose time has come. Clearly, considerable challenges remain to optimize efficiency and ensure the delivery of water with a quality appropriate to its end use at cost the customers can afford. These problems can be solved.

ACKNOWLEDGMENTS

This work was supported by Newton Fund Institutional Links [grant number 261839879]

REFERENCES

- [1] United Nations. (2018). Water. Retrieved from 18 March 2018, available at: <http://www.un.org/en/sections/issues-depth/water/>.
- [2] Klemm O, Schemenauer RS, Lummerich A *et al.* Fog as a fresh-water resource: overview and perspectives. *Ambio* 2012;**41**:221–34.
- [3] Khalil B, Adamowski J, Shabbir A *et al.* A review: dew water collection from radiative passive collectors to recent developments of active collectors. *Sustain Water Resour Manag* 2016;**2**:71–86.
- [4] Schemenauer RS, Cereceda P. A proposed standard fog collector for use in high-elevation regions. *J Appl Meteorol* 1994;**33**:1313–22.
- [5] Schemenauer R, Cereceda P. 2011. *Global Warming and the Third World. Fog Collection*. Tiempo Climate Cyberlibrary.
- [6] Park K-C, Chhatre SS, Srinivasan S *et al.* Optimal design of permeable fiber network structures for fog harvesting. *Langmuir* 2013;**29**:13269–77.
- [7] Shanyengana ES, Sanderson RD, Seely MK *et al.* Testing greenhouse shade nets in collection of fog for water supply. *J Water Supply Res T* 2003;**52**:237.
- [8] Rivera J D D, Lopez-Garcia D. Mechanical characteristics of Raschel mesh and their application to the design of large fog collectors. *Atmos Res* 2015;**151**:250–8.
- [9] Rivera J D D. Aerodynamic collection efficiency of fog water collectors. *Atmos Res* 2011;**102**:335–42.
- [10] FogQuest. (2017a). FOGQUEST Project in TOJQUIA Guatemala – Update May 2017. Guatemala, Latest News, from <http://www.fogquest.org/latest-news/>.
- [11] Mtuleni V, Henschel J, Seely MK. Evaluation of fog harvesting potential in Namibia. In: *Proceedings of the First International Conference on Fog and Fog Collection*, Vancouver, 1998.
- [12] Schemenauer RS, Fuenzalida H, Cereceda P. A neglected water resource: the Camanchaca of South America. *Bull Am Meteorol Soc* 1988;**69**:138–47.
- [13] Salbitano F, Calamini G, Certini G, *et al.* Dynamics and evolution of tree populations and soil-vegetation relationships in Fogscapes: observations over a period of 14 years at the experimental sites of Mejia (Peru) 5th International Conference on Fog, Fog Collection and Dew. , Münster, Germany, 2010.
- [14] Schemenauer RS, Cereceda P. Meteorological conditions at a coastal fog collection site in Peru. *Atmósfera*, [S.l.]. 2009;**6**:2395–8812.
- [15] Henderson B, Falk D. Fog water collection in Ecuador: an appropriate technology for the rural poor? In: *Proceedings of the 2nd International Conference on Fog and Fog Collection*, Vancouver, 2001.
- [16] Schemenauer RS, Cereceda P. Monsoon cloudwater chemistry on the Arabian Peninsula. *Atmos Environ Part A* 1992;**26**:1583–7.

- [17] Larrain H, Velásquez F, Cereceda P *et al.* Fog measurements at the site 'Falda Verde' north of Chañaral compared with other fog stations of Chile. *Atmos Res* 2002;**64**:273–84.
- [18] Calderón M, Cereceda P, Larrain P, *et al.* Alto Patache fog oasis in the Atacama Desert: geographical basis for a sustainable development program. In: *Proceedings of the 5th International Conference on Fog, Fog Collection and Dew*, Münster, 2010.
- [19] Schemenauer RS, Osses P, Leibbrand M. Fog collection evaluation and operational projects in the Hajja governorate, Yemen. In: *Proceedings of the Third International Conference on Fog, Fog Collection and Dew*, Cape Town, 2004.
- [20] Marzol Jaén MV. Fog water collection in a rural park in the Canary Islands (Spain). *Atmos Res* 2002;**64**:239–50.
- [21] NaturPhilosophie. (2016). The Fog Harvesters of Lima, Peru. Retrieved 1 November 2017 from <http://www.naturphilosophie.co.uk/fog-harvesters-lima-peru/>.
- [22] Lummerich A, Tiedemann KJ. Fog water harvesting on the verge of economic competitiveness. *ERDKUNDE* 2011;**65**:305–6.
- [23] Choiniere-Shields E (2013). The cloud harvester catches and stores fresh water from fog. From <http://inhabitat.com/httpinhabitat-comwp-adminpost-phppost519497actioneditmessage1/>.
- [24] Hobson B (2016). Arturo Vittori's Warka Water towers harvest clean drinking water from the air. Retrieved 8 November 2017, from www.dezeen.com/2016/11/10/video-interview-arturo-vittori-warka-water-tower-ethiopia-sustainable-clean-drinking-water-movie/.
- [25] Capital WD (2016). Sculptural Water Catchment System Warka Water Wins World Design Impact Prize 2015–2016 at World Design Capital(R) Taipei 2016 Gala. From <https://www.prnewswire.com/news-releases/sculptural-water-catchment-system-warka-water-wins-world-design-impact-prize-2015-2016-at-world-design-capitalr-taipei-2016-gala-300238691.html>.
- [26] WARKA WATER Inc. (2017). Warka Water Every Drops Counts. From <http://www.warkawater.org/project/>.
- [27] Davtalab R, Salamat A, Oji R. Water harvesting from fog and air humidity in the warm and coastal regions in the SOUTH of IRAN. *Irrig Drain* 2013;**62**:281–8.
- [28] Schemenauer RS, Joe PI. The collection efficiency of a massive fog collector. *Atmos Res* 1989;**24**:53–69.
- [29] Regalado CM, Ritter A. The design of an optimal fog water collector: a theoretical analysis. *Atmos Res* 2016;**178**–179:45–54.
- [30] Seo D, Lee J, Lee C *et al.* The effects of surface wettability on the fog and dew moisture harvesting performance on tubular surfaces. *Sci Rep* 2016;**6**:24276.
- [31] Weistron. (2014). Contact Angle Meter. Retrieved 21 November 2017 from <http://www.weistron.com/products/contact-angle-meter/>.
- [32] Azad MAK, Ellerbrok D, Barthlott W *et al.* Fog collecting biomimetic surfaces: influence of microstructure and wettability. *Bioinspir Biomim* 2015;**10**:016004.
- [33] Rajaram M, Heng X, Oza M *et al.* Enhancement of fog-collection efficiency of a Raschel mesh using surface coatings and local geometric changes. *Colloids Surf A Physicochem Eng Asp* 2016;**508**:218–29.
- [34] Domen JK, Stringfellow WT, Camarillo MK *et al.* Fog water as an alternative and sustainable water resource. *Clean Technol Envir* 2014;**16**: 235–49.
- [35] Garrod RP, Harris LG, Schofield WCE *et al.* Mimicking a Stenocara beetle's back for microcondensation using plasmachemical patterned superhydrophobic–superhydrophilic surfaces. *Langmuir* 2007;**23**:689–93.
- [36] Brown PS, Bhushan B. Bioinspired materials for water supply and management: water collection, water purification and separation of water from oil. *Philos Trans Royal Soc A* 2016;**374**:1–15.
- [37] Zheng Y, Bai H, Huang Z *et al.* Directional water collection on wetted spider silk. *Nature* 2010;**463**:640–643.
- [38] Dacey J (2010). Spider web inspires fibres for industry. Retrieved 21 November 2017 from <http://physicsworld.com/cws/article/news/2010/feb/03/spider-web-inspires-fibres-for-industry>.
- [39] Ebner M, Miranda T, Roth-Nebelsick A. Efficient fog harvesting by *Stipagrostis sabulicola* (Namib dune bushman grass). *J Arid Environ* 2011;**75**:524–31.
- [40] Bai F, Wu J, Gong G *et al.* Biomimetic 'cactus spine' with hierarchical groove structure for efficient fog collection. *Adv Sci* 2015;**2**:1500047.
- [41] Ju J, Bai H, Zheng Y *et al.* A multi-structural and multi-functional integrated fog collection system in cactus. 2012;**3**:1247.
- [42] Zhu H, Guo Z, Liu W. Biomimetic water-collecting materials inspired by nature. *Chem Commun* 2016;**52**:3863–79.
- [43] Ito F, Komatsubara S, Shigezawa N *et al.* Mechanics of water collection in plants via morphology change of conical hairs. *Appl Phys Lett* 2015;**106**:133701.
- [44] Ledbetter R (2016). Desert Survivor: Moss Quenches Thirst Using Optimized Water Collection System. Retrieved 27 February 2018 from <http://upr.org/post/desert-survivor-moss-quenches-thirst-using-optimized-water-collection-system>.
- [45] Zhang S, Huang J, Chen Z *et al.* Bioinspired special wettability surfaces: from fundamental research to water harvesting applications. *Small* 2017;**13**:1602992.
- [46] Cao M, Ju J, Li K *et al.* Facile and large-scale fabrication of a cactus-inspired continuous fog collector. *Adv Funct Mater* 2014;**24**:3235–40.
- [47] Gürsoy M, Harris MT, Carletto A *et al.* Bioinspired asymmetric-anisotropic (directional) fog harvesting based on the arid climate plant *Eremopyrum orientale*. *Colloids Surf A Physicochem Eng Asp* 2017a;**529**:959–65.
- [48] Gürsoy M, Harris MT, Downing JO *et al.* Bioinspired fog capture and channel mechanism based on the arid climate plant *Salsola crassa*. *Colloids Surf A Physicochem Eng Asp* 2017b;**529**:195–202.
- [49] Park K-C, Kim P, Grinthal A *et al.* Condensation on slippery asymmetric bumps. *Nature* 2016;**531**:78–82.
- [50] Shang L, Fu F, Cheng Y *et al.* Bioinspired multifunctional spindle-knotted microfibers from microfluidics. *Small* 2017;**13**:1600286.
- [51] Gido B, Friedler E, Broday DM. Liquid-desiccant vapor separation reduces the energy requirements of atmospheric moisture harvesting. *Environ Sci Technol* 2016;**50**:8362–7.
- [52] Beysens D, Clus O, Mileta M *et al.* Collecting dew as a water source on small islands: the dew equipment for water project in Bis'evo (Croatia). *Energy* 2007;**32**:1032–7.
- [53] Beysens D, Brogini F, Milimouk-Melnitouchouk I, Ouazzani J, Tixier N. Dew architectures—Dew announces the good weather. *Matérialités contemporaines = Materiality in its contemporary forms: architecture, perception, fabrication, conception*. MC 2012 Symposium, Villefontaine, novembre 2012, 2012, Isle d Abeau, France. 282–290. fthal-00993656f
- [54] Alnaser WE, Barakat A. Use of condensed water vapour from the atmosphere for irrigation in Bahrain. *Appl Energy* 2000;**65**:3–18.
- [55] Sharan G. Harvesting dew with radiation cooled condensers to supplement drinking water supply in semi-arid. *IJSLE* 2011;**6**:130–50.
- [56] Sharma DC. How Indian scientists have started harvesting potable drinking water from dew. 2017.
- [57] Jacobs AFG, Heusinkveld BG, Berkowicz SM. Passive dew collection in a grassland area, The Netherlands. *Atmos Res* 2008;**87**:377–85.
- [58] Clus O, Ouazzani J, Muselli M *et al.* Comparison of various radiation-cooled dew condensers using computational fluid dynamics. *Desalination* 2009;**249**:707–12.
- [59] Sharan G, Clus O, Singh S *et al.* A very large dew and rain ridge collector in the Kutch area (Gujarat, India). *J Hydrol* 2011;**405**:171–81.
- [60] Mohamed MH, William GE, Fatouh M. Solar energy utilization in water production from humid air. *Sol Energy* 2017;**148**:98–109.
- [61] Edmund A. *Method for Gaining Water Out of the Atmosphere*. Google Patents, 1938.
- [62] Dunkak EB. Solar Activated Dehumidifier. Google Patents, 1949.
- [63] Kaare KP. Method and device for recovering water from a humid atmosphere. 1998, US5846296 A.
- [64] Ackerman EB. (1968). Production of water from the atmosphere. US Patent. **US3400515 A**.

- [65] Kabeel AE. Water production from air using multi-shelves solar glass pyramid system. *Renew Energy* 2007;**32**:157–72.
- [66] Gad HE, Hamed AM, El-Sharkawy II. Application of a solar desiccant/-collector system for water recovery from atmospheric air. *Renew Energy* 2001;**22**:541–56.
- [67] William GE, Mohamed MH, Fatouh M. Desiccant system for water production from humid air using solar energy. *Energy* 2015;**90**: 1707–20.
- [68] Kumar M, Yadav A. Experimental investigation of solar powered water production from atmospheric air by using composite desiccant material 'CaCl₂/saw wood'. *Desalination* 2015;**367**:216–22.
- [69] Service, R. (2017). This New Solar-Powered Device can Pull Water Straight from the Desert Air. From <http://www.sciencemag.org/news/2017/04/new-solar-powered-device-can-pull-water-straight-desert-air>.
- [70] Kim H, Yang S, Rao SR *et al.* Water harvesting from air with metal-organic frameworks powered by natural sunlight. *Science* 2017; **356**: 430–434.
- [71] Bergmair D. 2015. *Design of a System for Humidity Harvesting Using Water Vapor Selective Membranes*. Technische Universiteit Eindhoven.
- [72] Bergmair D, Metz SJ, de Lange HC *et al.* A low pressure recirculated sweep stream for energy efficient membrane facilitated humidity harvesting. *Sep Purif Technol* 2015;**150**:112–8.
- [73] Woods J. Membrane processes for heating, ventilation, and air conditioning. *Renew Sustain Energy Rev* 2014;**33**:290–304.
- [74] Bergmair D, Metz SJ, de Lange HC *et al.* System analysis of membrane facilitated water generation from air humidity. *Desalination* 2014;**339**:26–33.
- [75] Yin Y, Qian J, Zhang X. Recent advancements in liquid desiccant dehumidification technology. *Renew Sustain Energy Rev* 2014;**31**:38–52.
- [76] Bui DT, Nida A, Ng KC *et al.* Water vapor permeation and dehumidification performance of poly(vinyl alcohol)/lithium chloride composite membranes. *J Membr Sci* 2016;**498**:254–62.
- [77] Bui TD, Wong Y, Thu K *et al.* Effect of hygroscopic materials on water vapor permeation and dehumidification performance of poly(vinyl alcohol) membranes. *J Appl Polym Sci* 2017;**134**:640–643.
- [78] Lukitobudi AR. Energy saving and environmentally friendly mobile atmospheric dehumidifier for water generator and drinking purposes. 2009, WO 2009048421 A1.
- [79] Sawyer GA, Larson R. Air conditioning and water-harvesting. *Google Patents*, 2016.
- [80] Magrini A, Cattani L, Cartesegna M *et al.* Production of water from the air: the environmental sustainability of air-conditioning systems through a more intelligent use of resources. The advantages of an integrated system. *Energy Procedia* 2015;**78**:1153–8.
- [81] Dalai P, Nanda P, Mund C *et al.* An experimental study on water harvesting from a modified window air-conditioner. *Energy Procedia* 2017;**109**:253–60.
- [82] EcoloBlue. (2017). EcoloBlue Water from Air. Retrieved 16 November 2017 from <https://ecoloblue.com/>.
- [83] ATLANTIS Solar. (2016). Atmospheric Water Generator. From http://www.atlantissolar.com/atlantis_h2o_elite.html.
- [84] Joshi VP, Joshi VS, Kothari HA *et al.* Experimental investigations on a portable fresh water generator using a thermoelectric cooler. *Energy Procedia* 2017;**109**:161–6.
- [85] Liu S, He W, Hu D *et al.* Experimental analysis of a portable atmospheric water generator by thermoelectric cooling method. *Energy Procedia* 2017;**142**:1609–14.
- [86] Smith-Strickland K (2013). A Billboard that Condenses Water from Humidity. From <http://www.popularmechanics.com/science/green-tech/a8875/a-billboard-that-condenses-water-from-humidity-15393050/>.
- [87] Cameron C. (2012). "Eole Water's Wind Turbine Generates Fresh, Clean Drinking Water from Condensation." Retrieved 8 December, 2019, from <https://inhabitat.com/eole-waters-wind-turbine-generates-fresh-clean-drinking-water-from-condensation/>.
- [88] Moses A (2011). Water from Thin Air: Aussie Ed's Airdrop an International Hit. From <http://www.smh.com.au/technology/sci-tech/water-from-thin-air-aussie-eds-airdrop-an-international-hit-20111110-1n8ks.html>.